



T-CRANE 1060

Working diagrams **without** counterweight

Static working diagrams

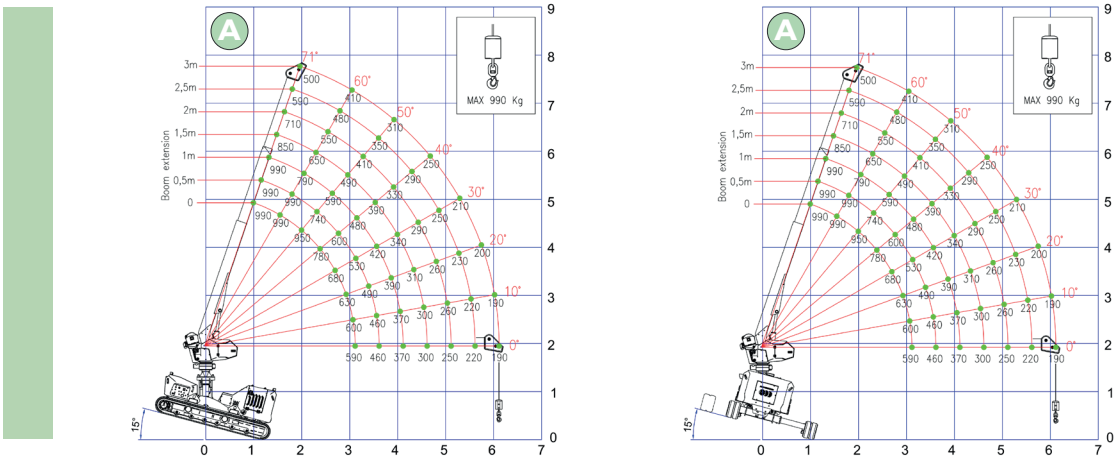


Driving working diagrams

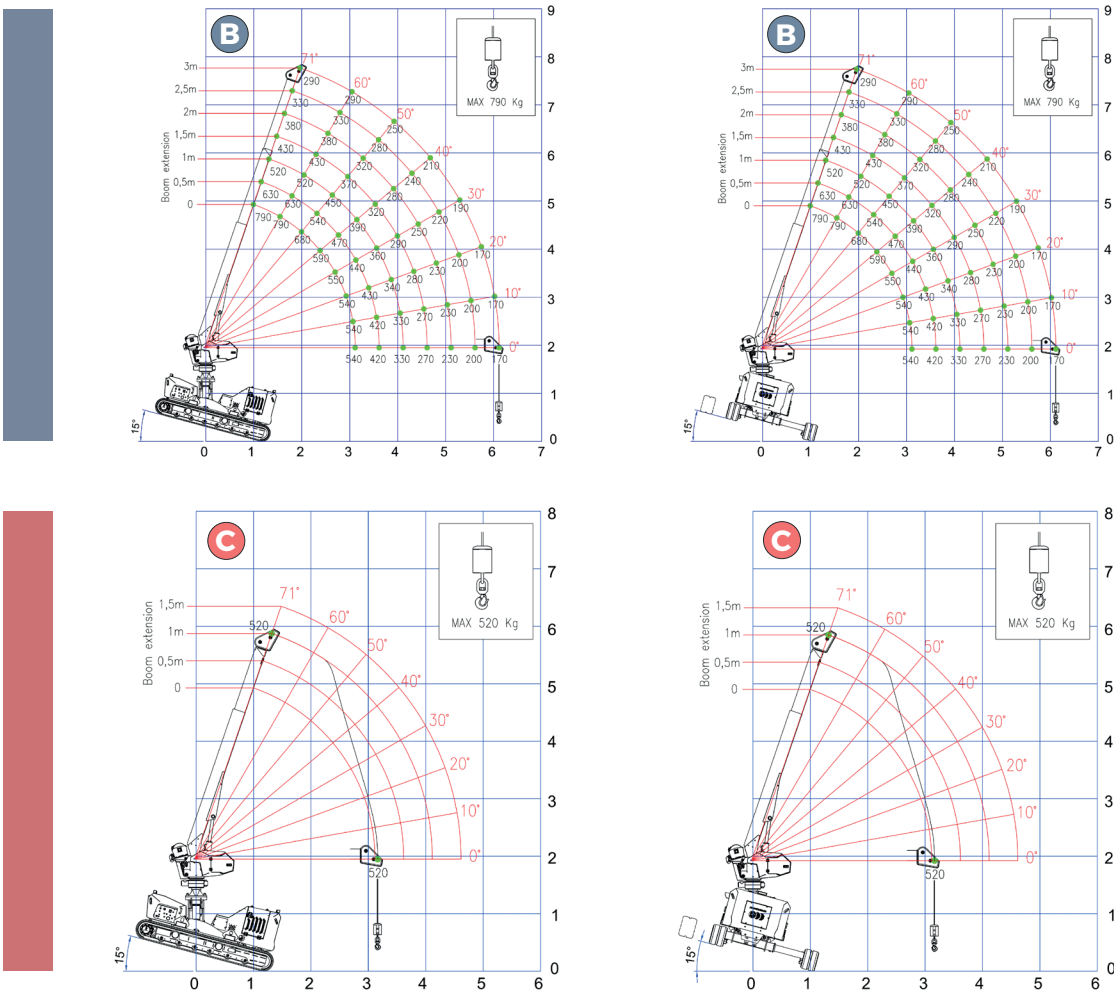


Working diagrams **with** counterweight

Static working diagrams

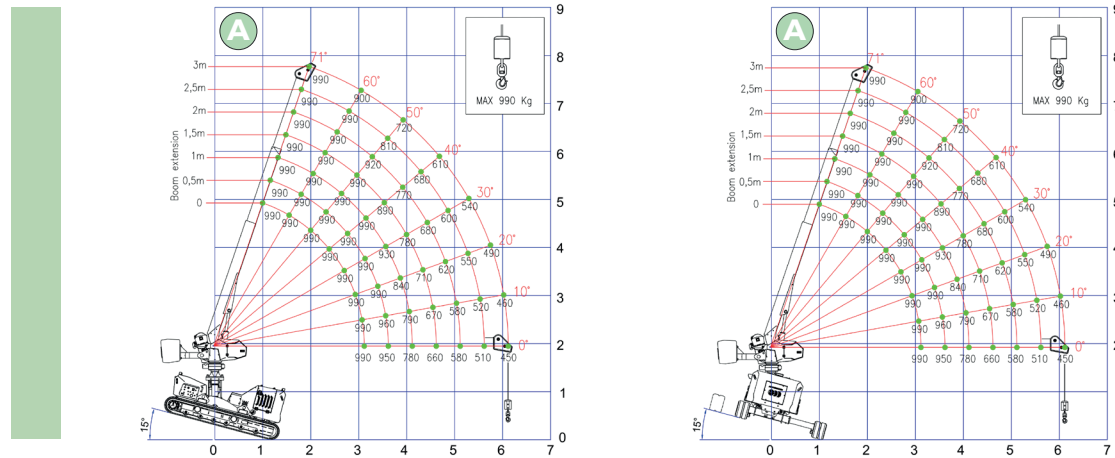

Driving working diagrams

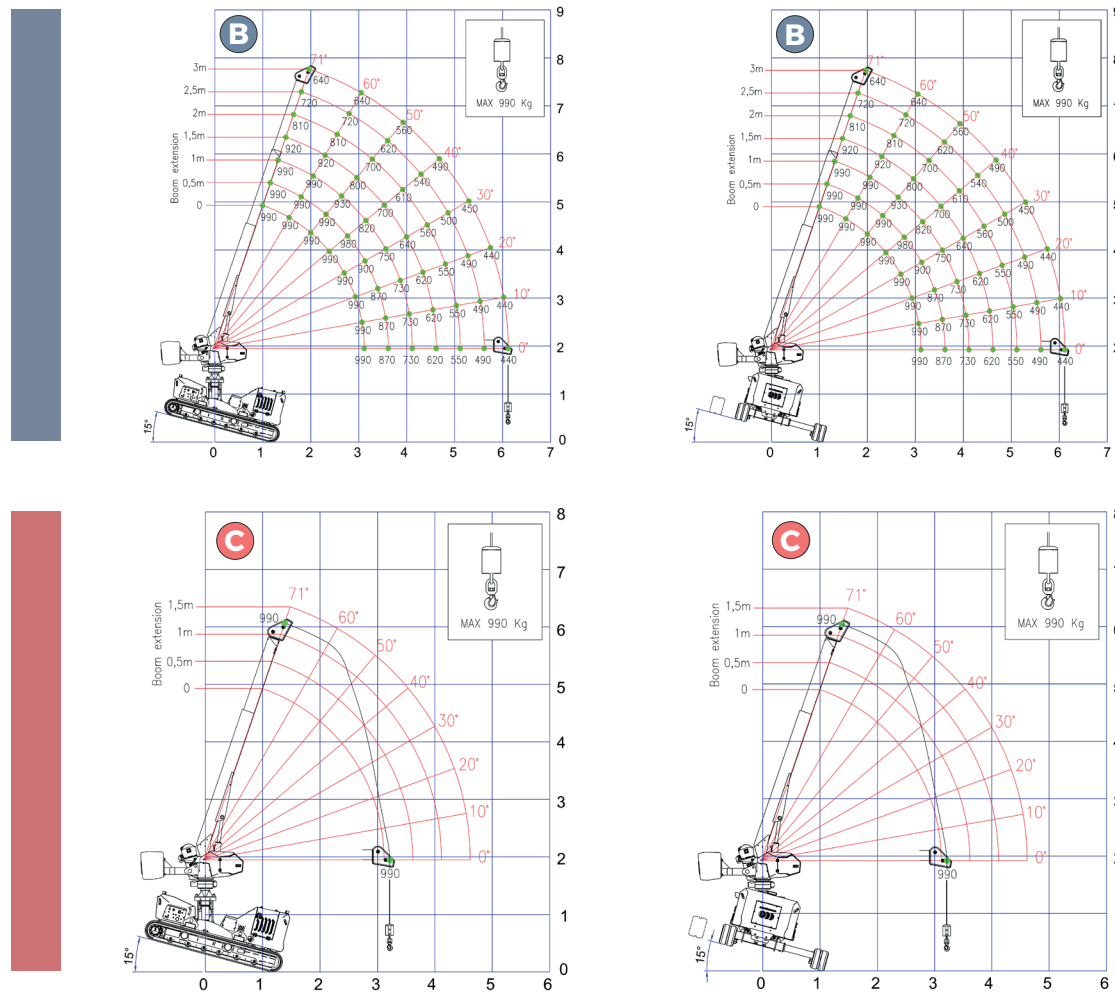

ALMACRAWLER

Rev.01



TRANS

GRUAS

ENTRE ESPECIALISTAS

Barcelona

938498388

Valencia

961344394

Madrid

918951758

Vitoria

945365601

www.transgruas.com

info@transgruas.com

T-CRANE
CRAWLER TELESCOPIC BOOM CRANE



1060



ALMACRAWLER

T-CRANE 1060

CRANE SELF-PROPELLED SELF-LEVELLING

The first pick&carry mini crane with self-levelling technology.

Highly flexible, T-Crane 1060 can be used in variety of lifting situations from internal to outdoor lifting, on slopes and uneven terrain up to 22°.

Equipped with our innovative levelling technology, the T-Crane 1060 easily travels and carries loads up to 990kg, featuring a 7.7m lifting height with a 6.1m maximum working radius.

Altamente flessibile, la T-Crane 1060 può essere utilizzata in diverse situazioni di sollevamento, da quelle interne a quelle esterne, su pendenze e terreni irregolari fino a 22° di inclinazione.

Dotata della nostra innovativa tecnologia di livellamento, la T-Crane 1060 trasporta facilmente carichi fino a 990 kg, con un'altezza di sollevamento di 7,7 metri e un raggio di lavoro massimo di 6,1 metri.

MODE WORKING DIAGRAMS

AUTO

STATIC



Maximum lifting performance


Massime performance di sollevamento

DRIVING



Automatic self-propelled function based on load and outreach

Abilitazione automatica alla traslazione in base al carico



Only working diagram of 990 kg (with counterweight)

Solo diagramma di lavoro di 990 kg (con zavorra)

7,7m
moving
height
altezza traslazione

DYNAMIC LEVELLING

15° LONGITUDINAL
15° LATERAL

Technical data

Max lifting height	7,7 m
Max moving height	7,7 m
Rotation angle	+/- 110°
Max working radius	6,11 m x 450 kg
Max. crane capacity	990 kg x 3,5m
Pick and carry capacity	990 kg
Length in stowed position with counterweight	4,32 m
Length in stowed position without counterweight	4,22 m
Min width in stowed position	1,35 m
Max working width	2,45 m
Min height in stowed position	1,91 m
Longitudinal leveling	+/- 15°
Lateral leveling	+/- 15°
Max gradeability	25°
Max side gradeability	25°
Drive speed (fast)	2,5 km/h
Security speed	0,3 km/h
Length of winch cable	30 m

Weights

Total weight with counterweight	3850 kg
Traffic load with counterweight	3,57 kN/m2
Total weight without counterweight	2850 kg
Traffic load without counterweight	2,64 kN/m2

Power

Engine	3TNM68 Yanmar engine (diesel) 17 Hp
Battery Charger	-

T-CRANE 1060

7,7 m
7,7 m
+/- 110°
6,11 m x 450 kg
990 kg x 3,5m
990 kg
4,32 m
4,22 m
1,35 m
2,45 m
1,91 m
+/- 15°
+/- 15°
25°
25°
2,5 km/h
0,3 km/h
30 m

EVO

3850 kg
3,57 kN/m2
2850 kg
2,64 kN/m2

LTH

3910 kg
3,63 kN/m2
2910 kg
2,7 kN/m2

Dati tecnici


Altezza massima di sollevamento
Altezza massima di traslazione
Angolo di rotazione torretta
Raggio di lavoro massimo
Capacità massima della gru
Capacità di prelievo e trasporto
Lunghezza richiusa con zavorra
Lunghezza richiusa senza zavorra
Larghezza minima richiusa
Larghezza massima di lavoro
Altezza minima richiusa
Livellamento longitudinale
Livellamento laterale
Pendenza massima superabile
Pendenza laterale massima
Velocità traslazione (rapida)
Velocità sicurezza
Lunghezza cavo verricello

Pesi

Peso totale con zavorra
Carico al suolo con zavorra
Peso totale senza zavorra
Carico al suolo senza zavorra

Potenza

Motore
Caricabatterie

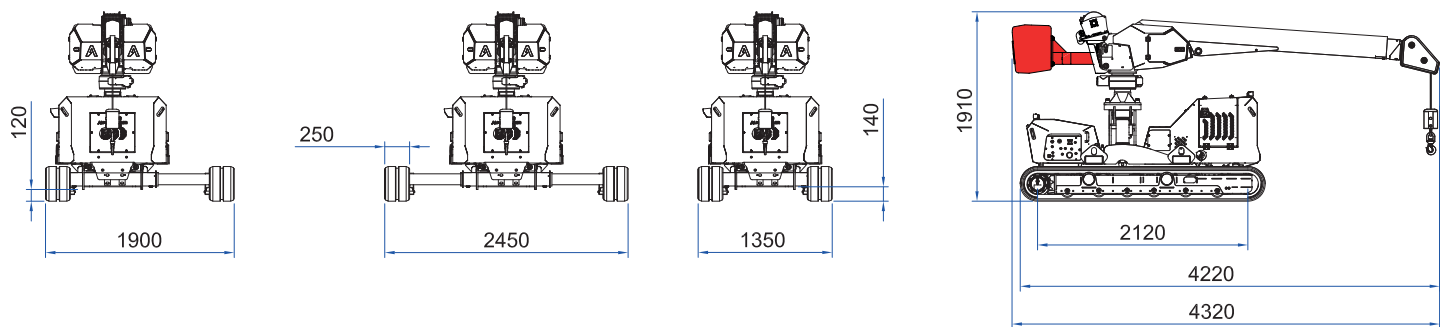

REMOVABLE COUNTERWEIGHT ZAVORRA RIMOVIBILE

Lowers the overall weight to 2.850 kg for easy transportation


Peso complessivo ridotto a 2.850 kg per un trasporto più agevole




Extras - On Demand

- Non-marking tracks
Cingoli antitraccia
- Electric pump 220V 2,2kW
Elettropompa 220V 2,2kW
- Lubricant kit for arctic climate
Kit Lubrificante per clima artico

Static working diagrams

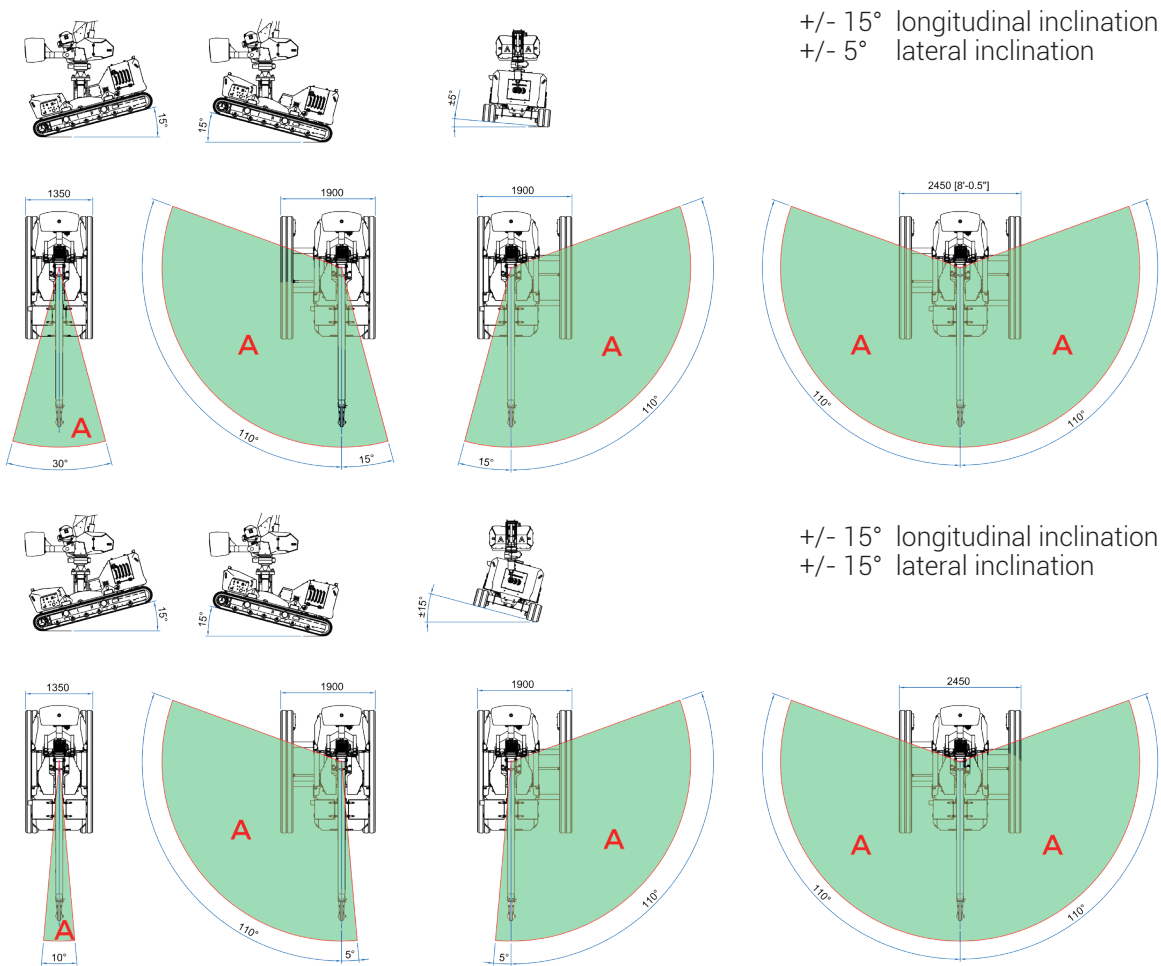

Driving working diagrams

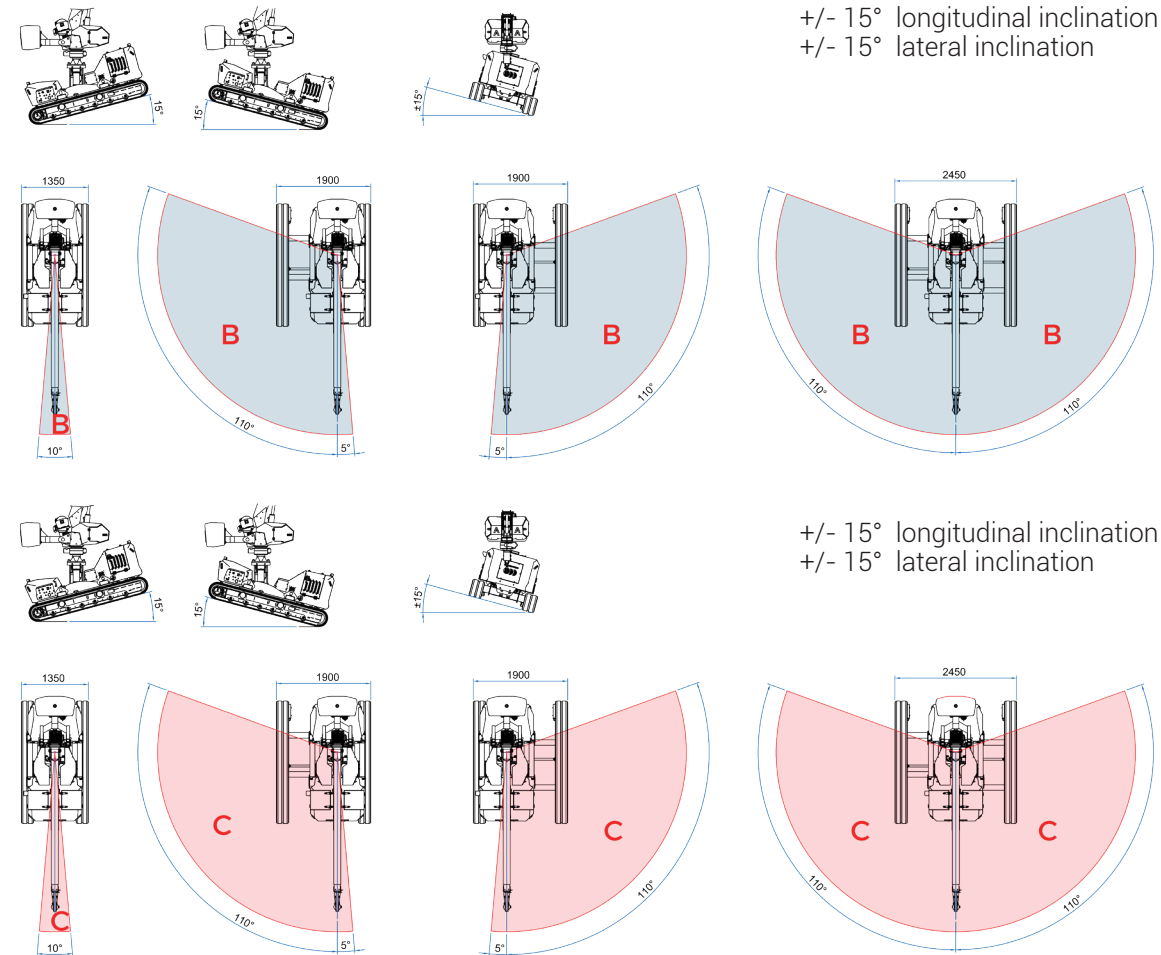

Simplify and centralize the management of all after-sales activities, spare parts purchasing and warranty procedures.

Semplifica e centralizza la gestione di tutte le attività post vendita, acquisto ricambi e richieste di garanzia.

MYALMAC
CONTROL
PANEL