



Electric Pick & Carry Cranes



MC 30S (metric)
Max Capacity 3.000 kg

MC 30S

RADIO REMOTE CONTROLLED

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHT

SEQUENTIAL TELESCOPING BOOM

TILTING HEAD 4 POSITIONS
(0°/+30°/+55°/+80°)

Optionals:

- HYDRAULIC WINCH
- BENDABLE MANUAL EXTENSION
- NON-MARKING TIRES
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING





Load charts



Technical features

Max Capacity	 3.000
Dimensions mm	 2450x780x1650

	Front-wheels drive. N°2 x traction motors 35 kW	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 3.500 Removable counterweight Kg. 800		Automatic braking system on all wheels
	48 V - 525 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 2 cushion 28x10-22" Rear nr. 2 non-marking 15x4,5- 8"		Angolo di inclinazione +55°/-10°
	Rear Steering angle -90°/+90°		Motor driven pump 8 kW - 48 V DC, Insulation class H

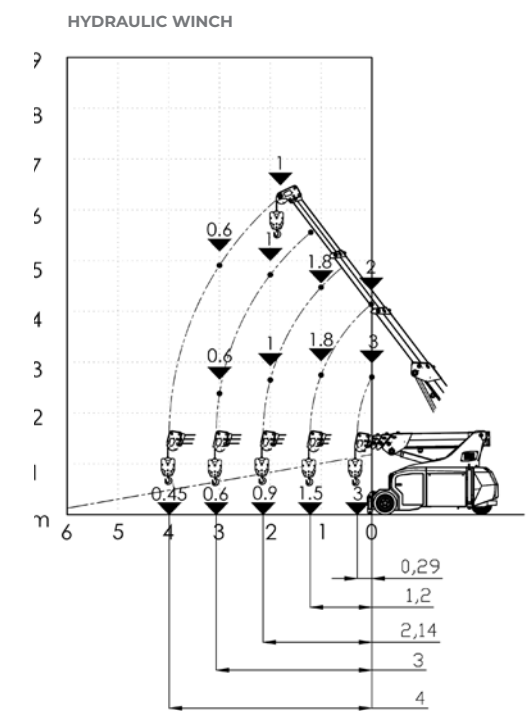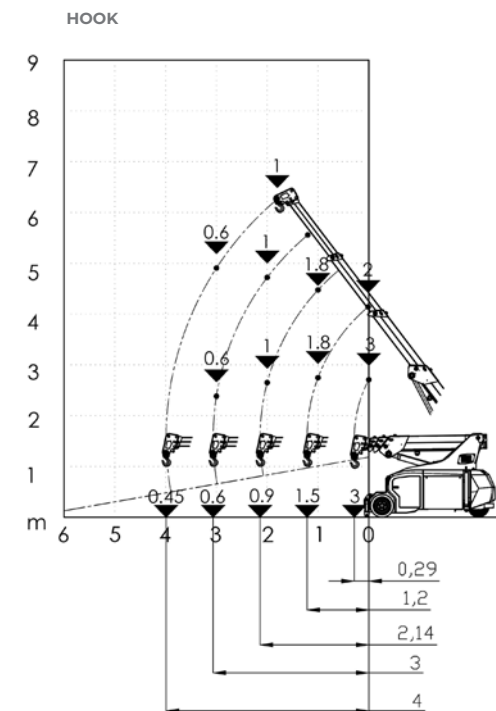

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2000/14-4301 -1:A1 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 e and subsequent modifications



Dimensions

