



Electric Pick & Carry Cranes



MC 650 (metric)
Max Capacity
65.000 kg



Barcelona
938498388

Valencia
961344394

Madrid
918951758

Vitoria
945365601

www.transgruas.com
info@transgruas.com



MC 650

- FRONT-WHEELS DRIVE WITH COUNTER ROTATION
- HYDRAULICALLY TELESCOPING PROPORTIONAL TYPE BOOM
- N° 2 INDEPENDENT STEERING GROUPS
- SELF-LOADING/UNLOADING OF BALLASTS
- 3-POSITION TILTING MECHANICAL BOOM HEAD

Optionals:

- 55 T HYDRAULIC WINCH WITH 10° PULL
- FRONT OUTRIGGERS REMOVABLE
- NON-MARKING TIRES
- RADIO REMOTE CONTROL
- ATEX CONVERSATION
- CUSTOMIZED PAINTING






Technical features

Max Capacity kg	65.000
Dimensions mm	5500x2500x2350

	Front-wheels drive. 2 electric motors AC 16 kW 96V AC. Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 45.000 Removable counterweights Kg. 17.500		Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
	96 V - 1550 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front n° 4 cushion: n 2° 40x20-30" n 2° 40x12-30 Rear n.4 cushion 840x356x559		+65°/-5°
	Rear Steering angle -90°/+90°		Motor dive pump 2x 35 kW - 96 V AC. Insulation class H.



Dimensions

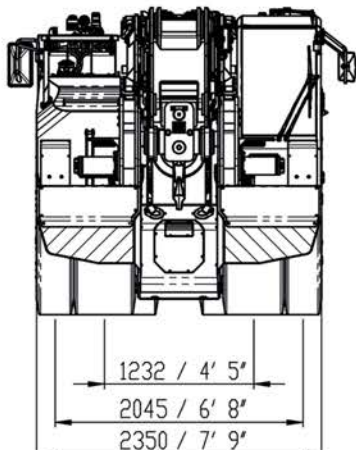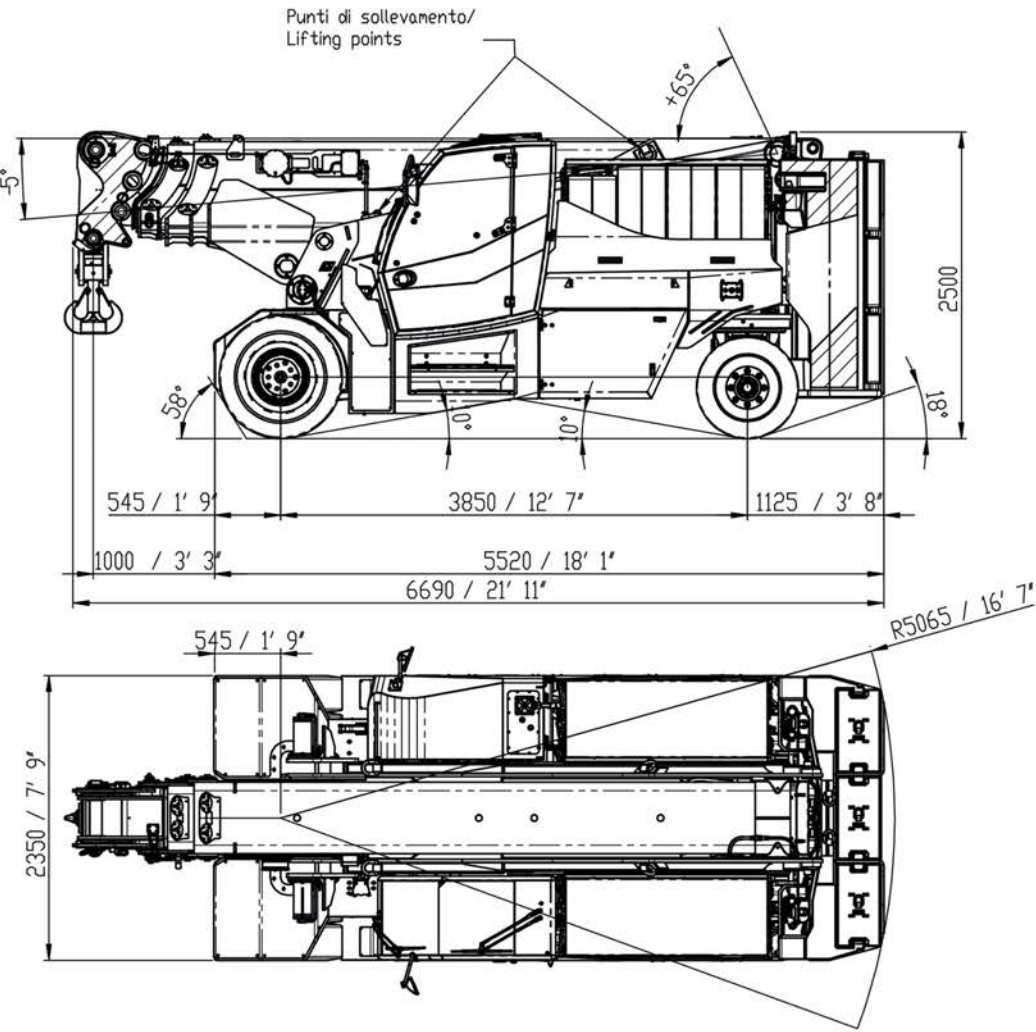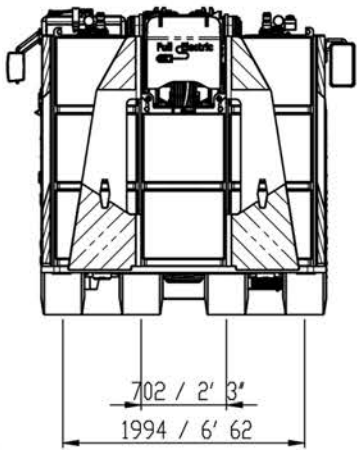


EU Standards CE

	UNI ISO 4301-1: A1
	2006/42 CE-2014/30 UE-2014/35 UE- 2000/14 and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications


Configurazione	Peso [kg]	Weight (LB)
NZ	27500	60627
Z1	34200	75398
Z2	38250	84326
Z3	42300	93255
Z4	45000	99208

MC 650

Load charts

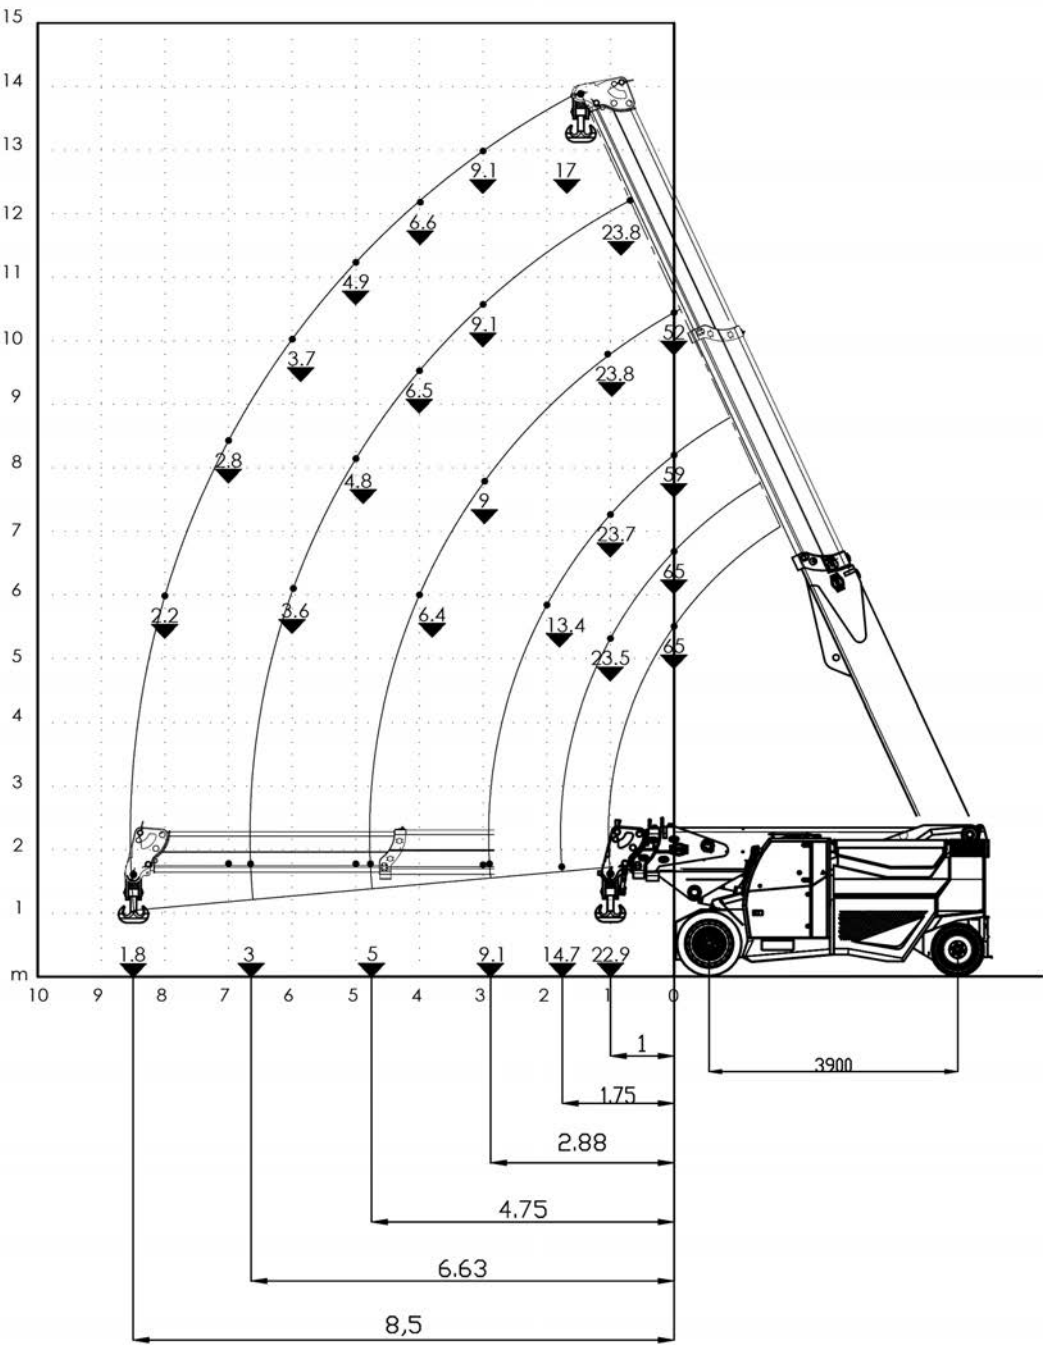


NZ/ NO FRONT OUTRIGGERS

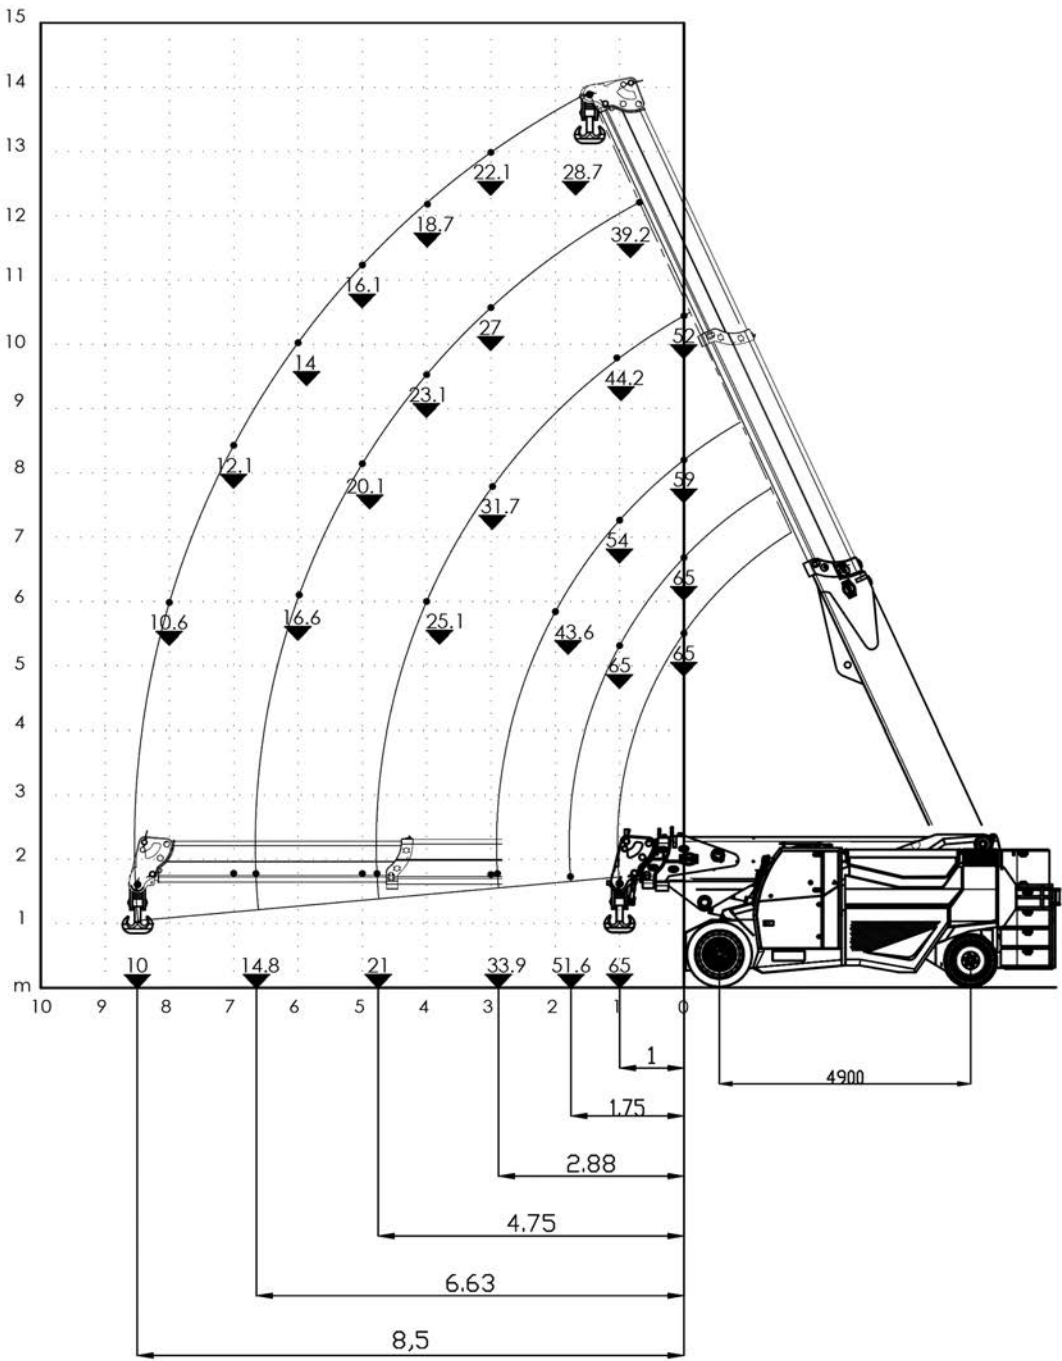


Z 17,5 T / NO FRONT OUTRIGGERS

MC 650

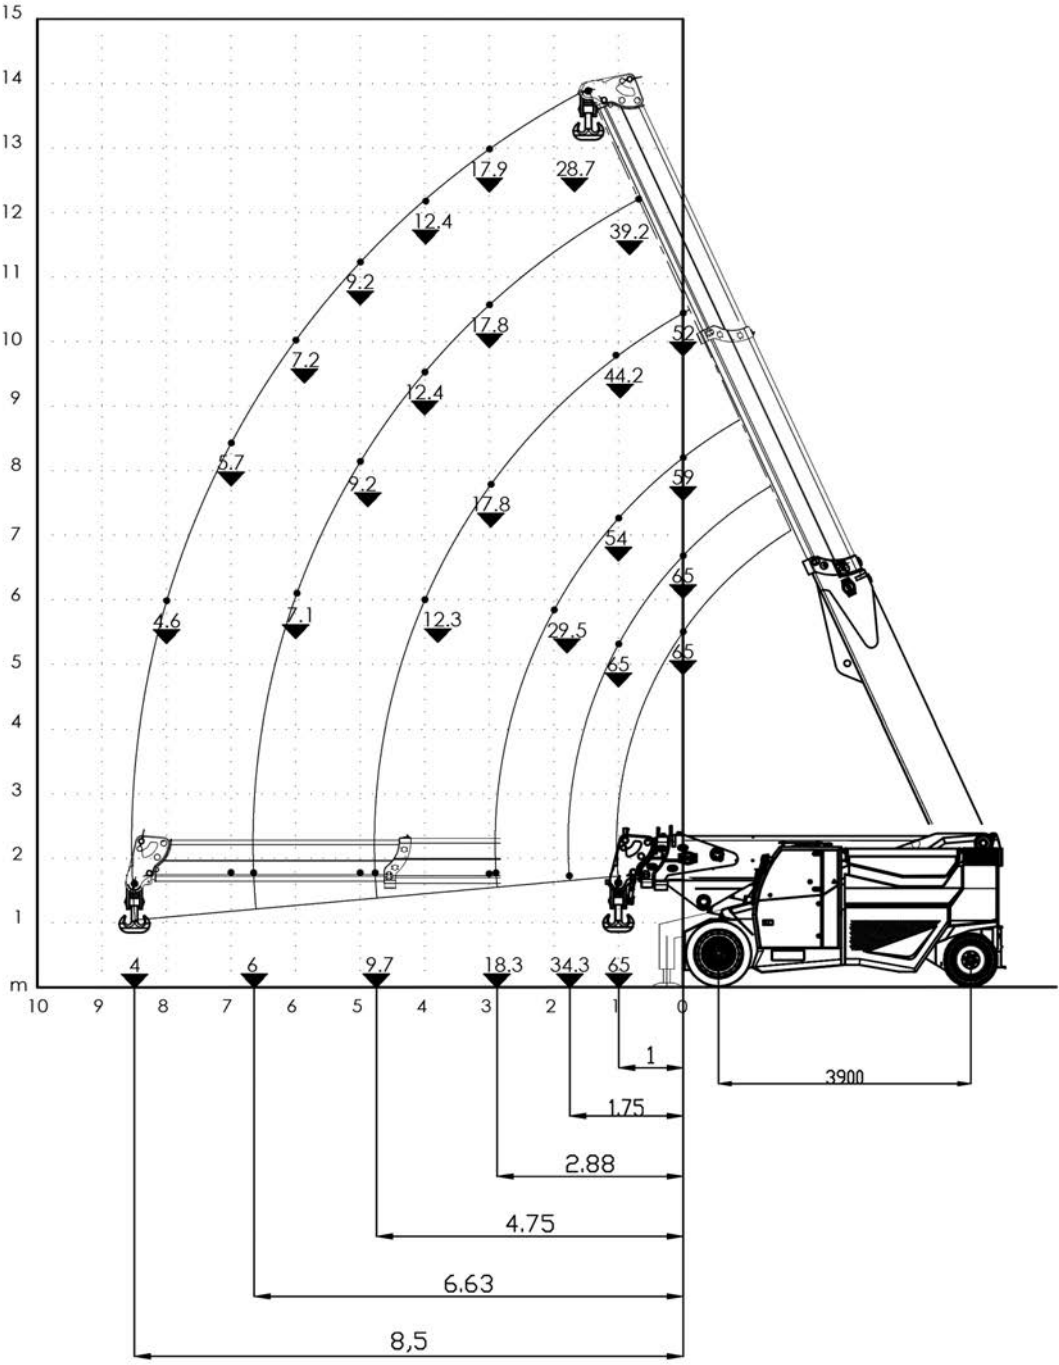

NZ / OPEN FRONT OUTRIGGERS

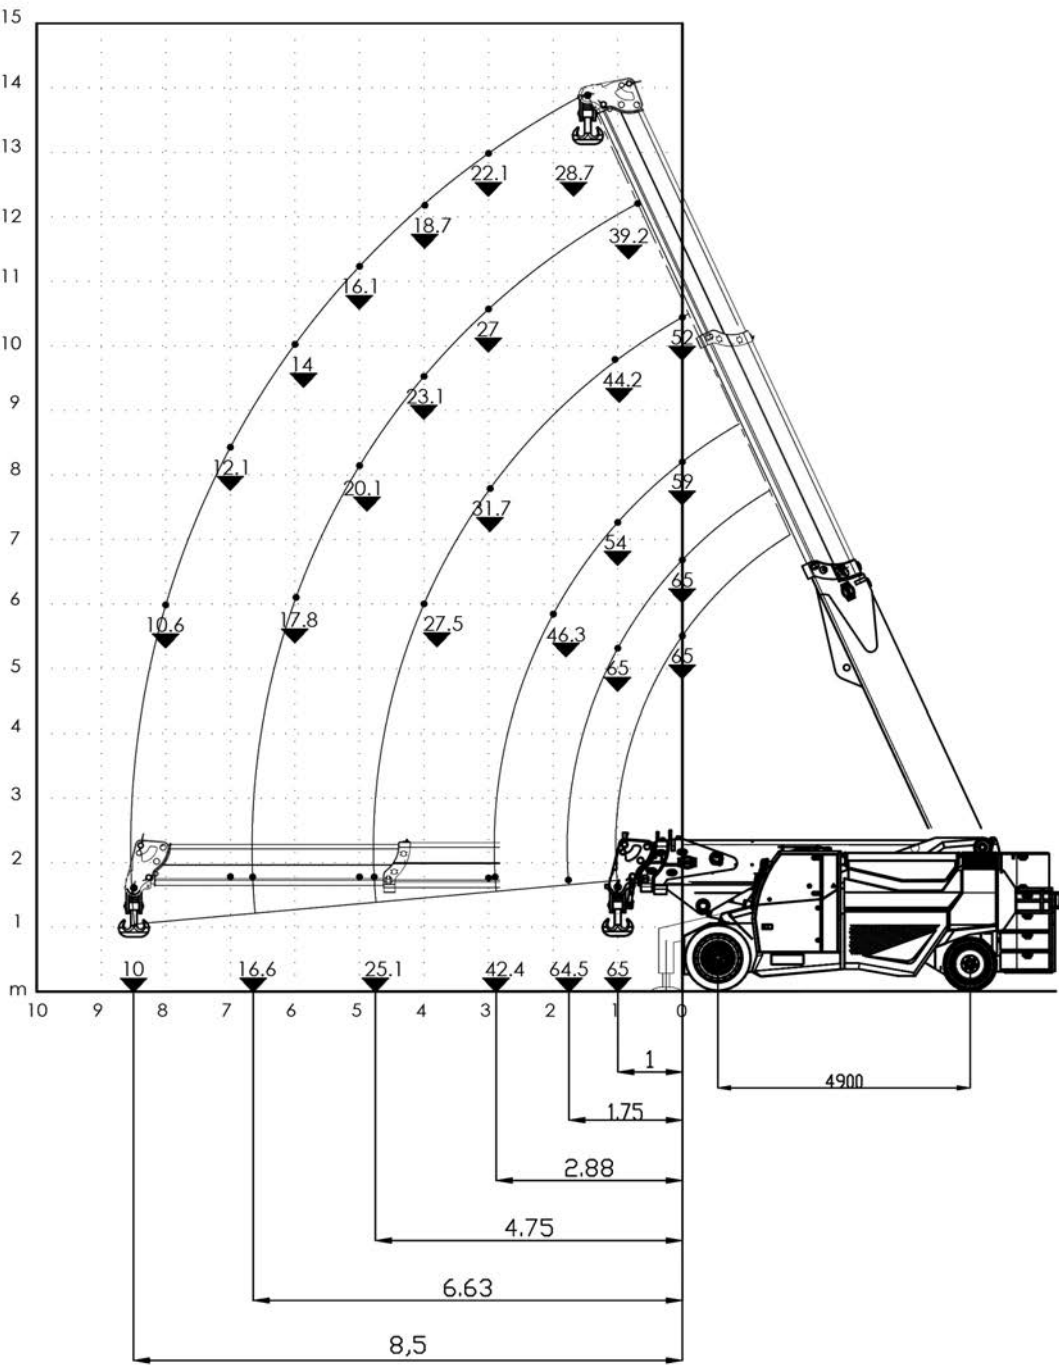

Z 17,5 T / OPEN FRONT OUTRIGGERS