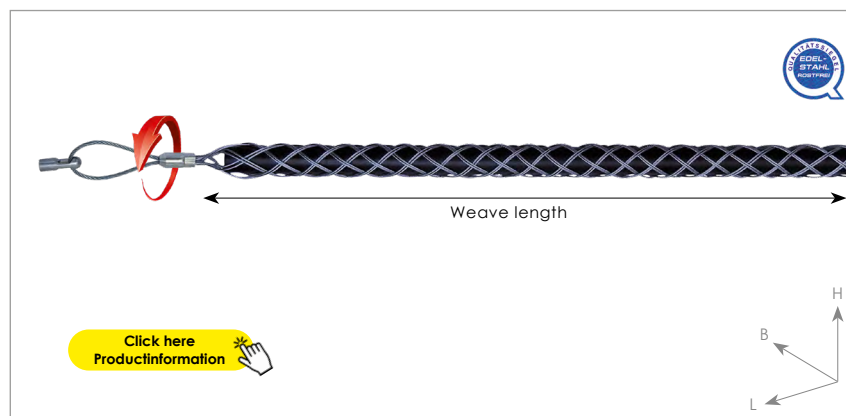
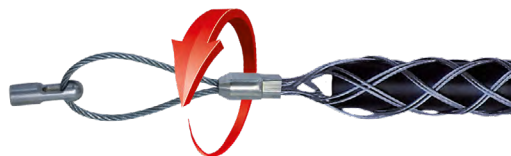


CABLE PULLING GRIP with loop and thread

for pipe diameter Ø 9 – 31 mm

Item no.: **20266** | **20267** | **20268** | **20269**

Detailed image:

**DATA**

ITEM NO.	20266	20267	20268	20269
Ø MM	9 - 15 mm	15 - 19 mm	19 - 25 mm	25 - 31 mm
WEAVE LENGTH	350 mm	400 mm	400 mm	450 mm
WEIGHT	0,039 kg	0,05 kg	0,057 kg	0,063 kg
EAN-CODE	9120045473728	9120045473735	9120045473742	9120045473759
BREAKING LOAD	180 kg			
MATERIAL	Flexible stainless steel wire mesh			

ADVANTAGES

- Incl. twist adjustment
- Tensile load up to 180 kg
- Flexible stainless steel wire braiding
- Extremely long service life
- Stainless steel
- Highest quality materials

DESCRIPTION

Cable pulling sleeve with loop and RUNPOTEC RTG thread (Ø 6 mm), including integrated twist compensation. Made from flexible, rust-proof stainless steel wire mesh for maximum stability, optimum force transmission and an extremely long service life. The integrated twist compensation allows the cable to twist within the conduit, thereby preventing the thread from unscrewing or becoming damaged. The high-quality workmanship and robust material ensure reliable performance even under heavy loads. Compatible with GF3, RUN-POSTICKS and GF4.5 – GF11 fibre optic rods. Total breaking load up to 180 kg. Not suitable for lifting loads – use exclusively for horizontal cable pulling.

Scope of supply: 1 x Cable pulling grip with loop and thread RTG Ø 6 mm, incl. swivel

INFORMATION

Use with:

GF3 Fiberglass rod Ø 3 mm

with or without meter counter
 20 - 50 m - Item no. 10192 - 10195
 20 - 50 m - Item no. 10196 - 10198



Click here
Productinformation

GF3 SLIM Fiberglass rod Ø 3 mm

with or without meter counter
 20 - 50 m - Item no. 10207 - 10209
 20 - 50 m - Item no. 10210 - 10212



Click here
Productinformation

Fiberglass rods

GF4.5, GF6, GF7.5,
 GF9, GF11, GF 15



Click here
Productinformation

RUNPOSTICKS

Item no. 10016 - 17-parts
 Item no. 10020 - 19-parts
 Item no. 10173 - 35-parts



Click here
Productinformation