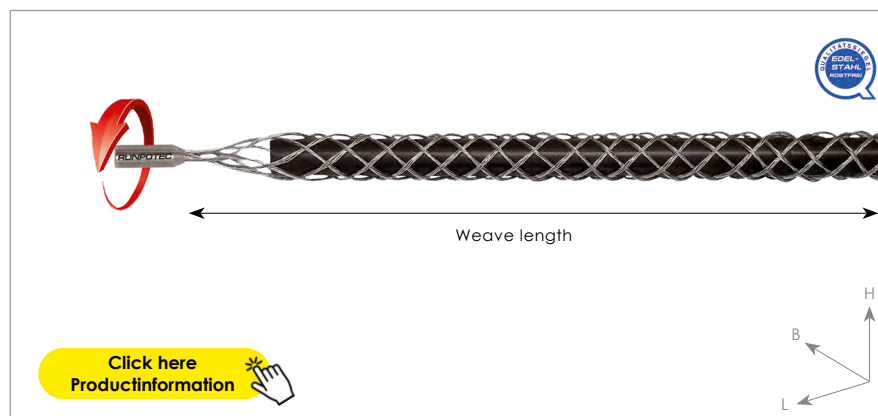


CABLE PULLING GRIP with thread RTG Ø 6 mm

for pipe diameter Ø 4 – 13 mm

Item no.: **20365** | **20366** | **20367**

Detailed image

**DATA**

ITEM NO.	20365	20366	20367
Ø MM	4 - 6 mm	6 - 9 mm	9 - 13 mm
WEAVE LENGTH	180 mm	200 mm	300 mm
WEIGHT	0,018 kg	0,021 kg	0,026 kg
EAN-CODE	9120045474114	9120045474121	9120045474138
TOTAL BREAKING LOAD	120 kg		
THREAD	RTG Ø 6 mm		
MATERIAL	Stainless steel wire mesh		

ADVANTAGES

- Incl. twist adjustment
- Tensile load up to 120 kg
- Flexible stainless steel wire braiding
- Extremely long service life
- Stainless steel
- Highest quality materials

DESCRIPTION

Cable pulling sleeve with RUNPOTEC thread RTG Ø 6 mm, including integrated twist compensation. Made from flexible, rust-proof stainless steel wire mesh for maximum stability and an extremely long service life. The integrated twist compensation allows the cable to twist within the conduit, thereby preventing the thread from unscrewing. The high-quality workmanship and robust material ensure reliable performance even under heavy loads. Compatible with GF3, RUNPOSTICKS and GF4.5 and GF6 fibre-optic rods. Tensile load up to 120 kg. Not suitable for lifting loads – use exclusively for horizontal cable pulling.

Scope of supply: 1 x Cable pulling grip with thread RTG Ø 6 mm, incl. swivel

INFORMATION

Use with:

GF3 Fiberglass rod Ø 3 mm

with or without meter counter
 20 - 50 m - Item no. 10192 - 10195
 20 - 50 m - Item no. 10196 - 10198



Click here Productinformation

GF3 SLIM Fiberglass rod Ø 3 mm

with or without meter counter
 20 - 50 m - Item no. 10207 - 10209
 20 - 50 m - Item no. 10210 - 10212



Click here Productinformation

Fiberglass rods

GF4.5 and GF6
 Length 30 - 80 m



Click here Productinformation

RUNPOSTICKS

Item no. 10016 - 17-parts
 Item no. 10020 - 19-parts
 Item no. 10173 - 35-parts



Click here Productinformation