



Potatoes Equipment

Cup feed potato planters C1/2/3/2x2/4

Precise and homogeneous plantation for high productivity

The JJ Broch cup feed potato planters guarantee precision in the dispensing and positioning of the seeding potato thanks to its design and perfect performance in the field.




Modelo C-1




Modelo C-3



SPECIFICATIONS	C-1	C-2	C-3	C-2x2	C-4
Number of rows	1	2	3	2x2	4
Distance inter-rows (cm)	70-100	70-100	70-100	70-100	70-100
Plants per metre	2-7	2-7	2-7	2-7	2-7
Performance (Ha/h)	0,10-0,20	0,30-0,50	0,50-0,90	0,30-0,50	0,60-1
Total width (cm)	90	175	200 a 250	225	340 a 400
Total length (cm)	120	166	170	166	170
Total height (cm)	170	170	170	170	170
Hopper capacity approx (l)	100	600	800	600	1000
Weight (kg)	270	520	890	520	1100
Power (HP)	20	70	80	70	90

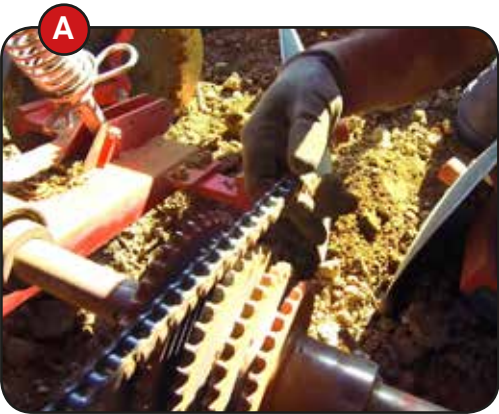

A. Easy adjustment of dose seeding
The combination between the two groups of pinions is adjusted by moving the transmission chain. The desired seeding dose is easily adjusted with this simple operation.

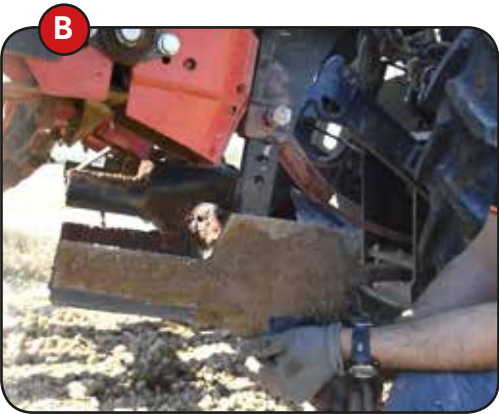

B. Height adjustable opening shares
The opening shares move a minimum amount of soil and open a furrow of the exact seeding depth. With a bolt, the seeding depth is easily adjusted.



C. Great capacity hopper and easy loading
A single hopper ensures a continuous flow of potatoes in each seeding element. Its capacity and height permits easy loading and great autonomy, thus improving the hourly work yield.



D. Vibration system Anti-doubles
Each belt is equipped with a mechanical vibration system that eliminates double potatoes of each tray.



E. Easy adjustment of tension belt.
The tension of each belt is adjusted independently, by means of a simple spring system.




F. Rear mulboards
A set of reinforced opening shares simultaneously form the furrows, improving the development of the crop and later harvesting.

Potato Diggers

recision, easy to use and hight output

Potatoes digger JJ Broch are ideal for harvesting small and large areas due to their reliability, high performance and low maintenance costs.

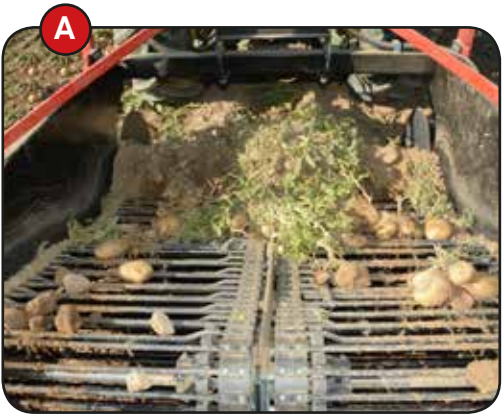

A. Steel rods conveyor band




B. Plant cutter and depth control disks



C. Plowshare for different type of soil



D. Hydraulic safety valve

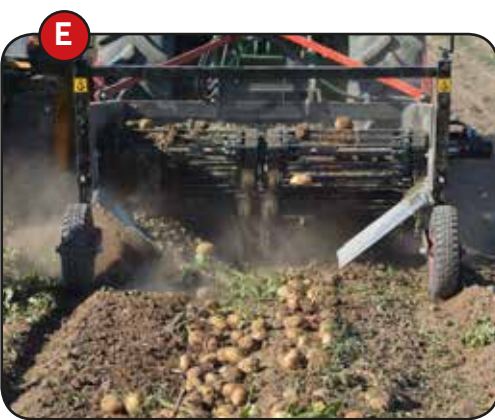

E. Vibrating rear grill. (option)

SPECIFICATIONS	A-2-2-200 L	A-2-2-180 L	A-2-2-150 L	A-2-2-150 C	A-2-1-125 C
Number of rows	2	2	2	2	2
Row width (mm)	900 - 1000	800 - 900	700 - 750	700 - 750	600 - 700
Performance (Ha/h)	0,20 - 0,30	0,20 - 0,30	0,15 - 0,25	0,15 - 0,25	0,13 - 0
Total width (cm)	320	320	320	230	230
Total length (cm)	240	225	195	195	170
Cleaning surface (mm)	1890	1890	1890	1450	1450
Weight (kg)	950	860	750	640	590
Power (HP)	60	60	55	55	50

Technical data

OPTIONS

Cup feed potato planters

- * Rear harrow
- * Extra hopper
- * Quick linkage kit
- * Rear share with safety spring
- * Rear covering discs
- * Fertilizer
- * Microgranulator
- * Electrical vibration of seeding belt
- * Hydraulic markers
- * Electrical vibration of hopper
- * Special row distance upon request
- * Rear bed former
- * Front share on parallelogram

Potato Diggers

- * Mechanical vibration of the belt
- * Rear vibrating screen
- * Front compressing roller (A-2-2-200 L)
- * Rear belt for side unloading



Cup feed potato planters

	C-1	C-2	C-3	C-2x2	C-4
Number of rows	1	2	3	2x2	4
Distance inter-rows (cm)	70-100	70-100	70-100	70-100	70-100
Plants per metre	2-7	2-7	2-7	2-7	2-7
Performance (Ha/h)	0,10-0,20	0,30-0,50	0,50-0,90	0,30-0,50	0,60-1
Total width (cm)	90	175	200 a 250	225	340 a 400
Total length (cm)	120	166	170	166	170
Total height (cm)	170	170	170	170	170
Hopper capacity approx (l)	100	600	800	600	1000
Weight (kg)	270	520	890	520	1100
Power (HP)	20	70	80	70	90

Potato Diggers

	A-2-2-200 L	A-2-2-180 L	A-2-2-150 L	A-2-2-150 C	A-2-1-125 C
Number of rows	2	2	2	2	2
Row width (mm)	900 - 1000	800 - 900	700 - 750	700 - 750	600 - 700
Performance (Ha/h)	0,20 - 0,30	0,20 - 0,30	0,15 - 0,25	0,15 - 0,25	0,13 - 0
Total width (cm)	320	320	320	230	230
Total length (cm)	240	225	195	195	170
Cleaning surface (mm)	1890	1890	1890	1450	1450
Weight (kg)	950	860	750	640	590
Power (HP)	60	60	55	55	50



DEALER



Tel. +34 918 711 297
Fax +34 918 711 433
jjbroch@jjbroch.com
sales@jjbroch.com

C/ Vereda del Alquitón, 13
28500 Arganda del Rey
Madrid · SPAIN

www.jjbroch.com

