
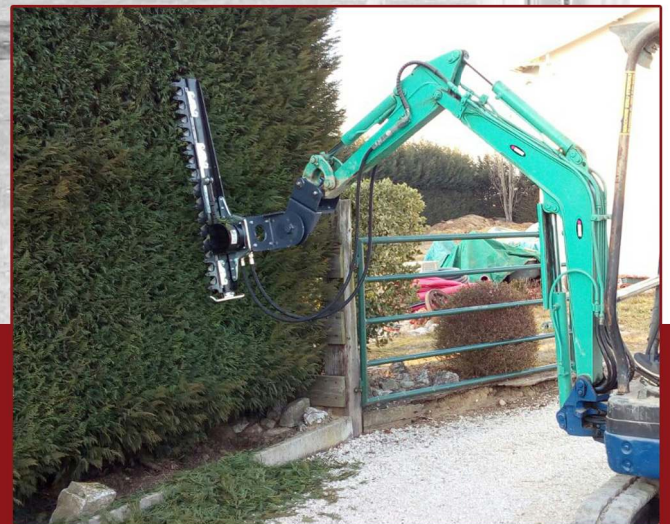


Cortasetos en punta de retro

Hedge trimmer - Backhoe mounted

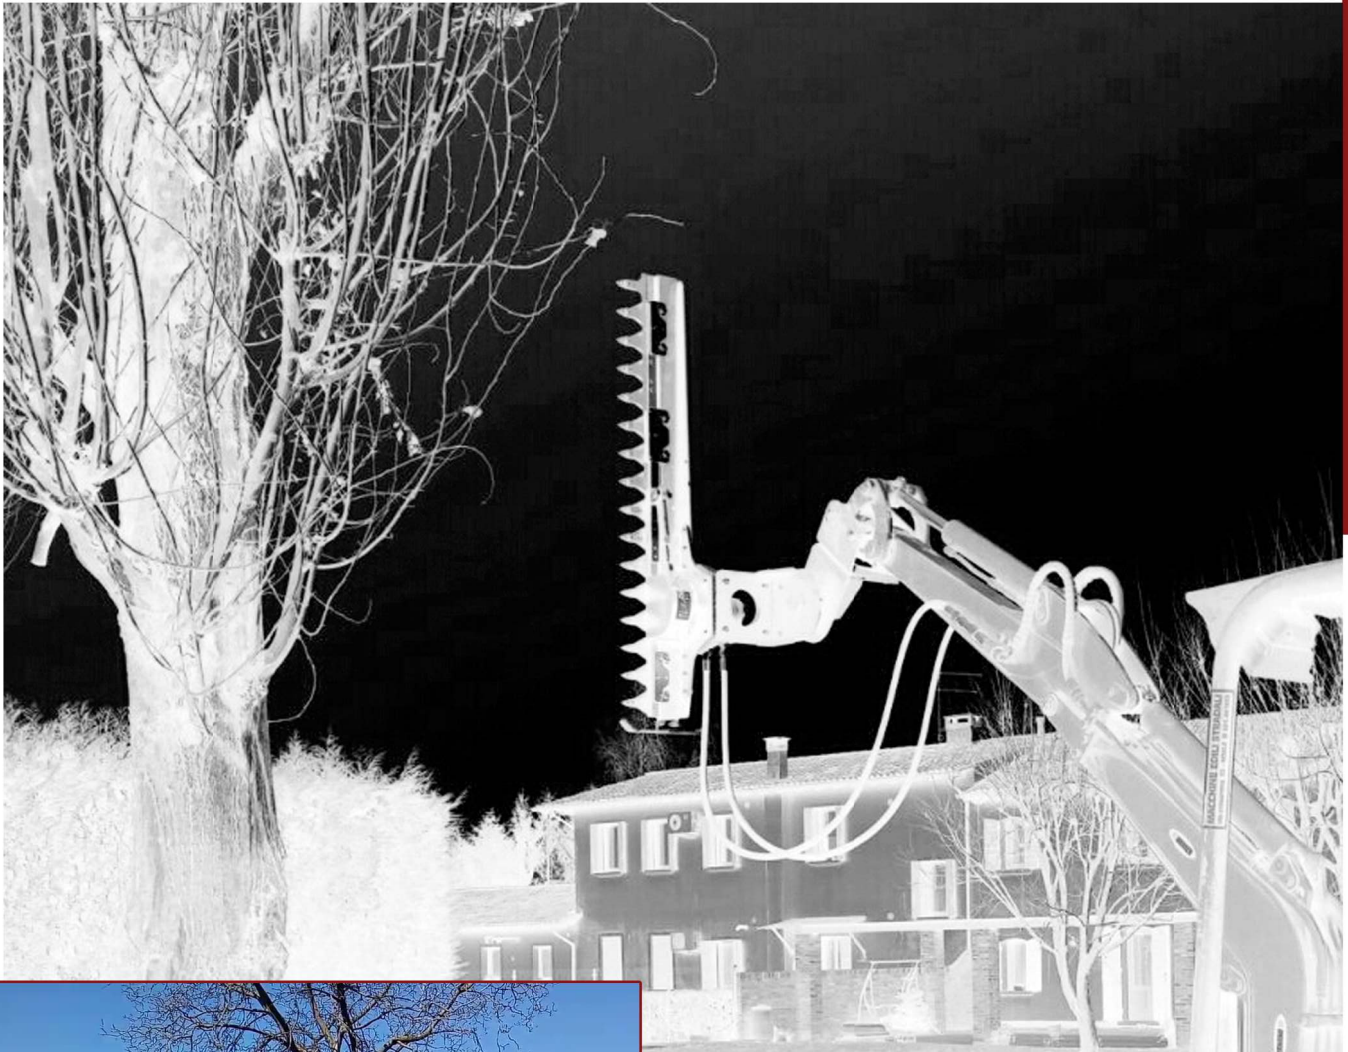

Características


Specifications




- ▲ Equipado con junta dentada Hirth para posicionarlo para corte horizontal o vertical.
Equipped with Hirth toothed coupling to position it for horizontal or vertical cutting.



- ▲ Acoplamiento a máquina y junta dentada Hirth, de ajuste manual, atornillados.
Attachment plate and Hirth toothed coupling with manual adjustment both bolted.

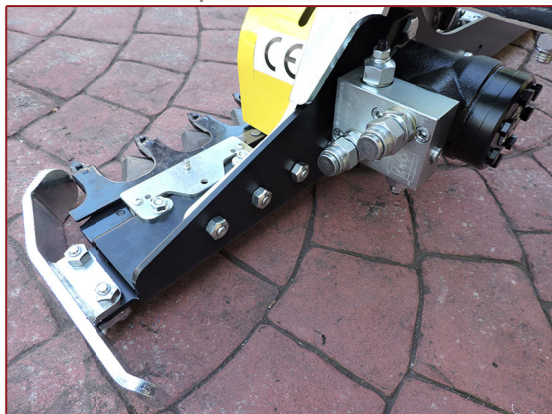

- ▲ Se conecta a la instalación de martillo hidráulico de la máquina.
Barra de corte con cuchilla de borde dentado y dientes a sierra reemplazables atornillados.
Connects to the hydraulic hammer installation of the machine.
Cutting bar with tooth edge blade and replaceable saw teeth screwed.

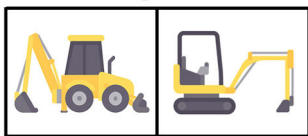

- ▲ Sencilla y rápidamente acoplable a una gran cantidad de máquinas.
Easily and quickly attached to different machines.

Especificaciones Técnicas

Technical features

Modelo Model	Peso máquina Weight machine	Anchura de corte Cutting width	Ø Corte Cutting Ø	LPM	Bar	Peso Weight
	(Ton)	(mm)	(Max. mm)			(Kg) (*)
HT1200	1 - 5	1200	30	25 / 50	180	45
HT1600	2 - 5	1600	30	25 / 50	180	55
HT1800	2 - 5	1800	30	25 / 50	180	65

- (*) Sin enganche y sin junta dentada Hirth.
Without hitch and without Hirth toothed coupling.