




Hojas dozer con angulación hidráulica

Dozer blades with hydraulic angling

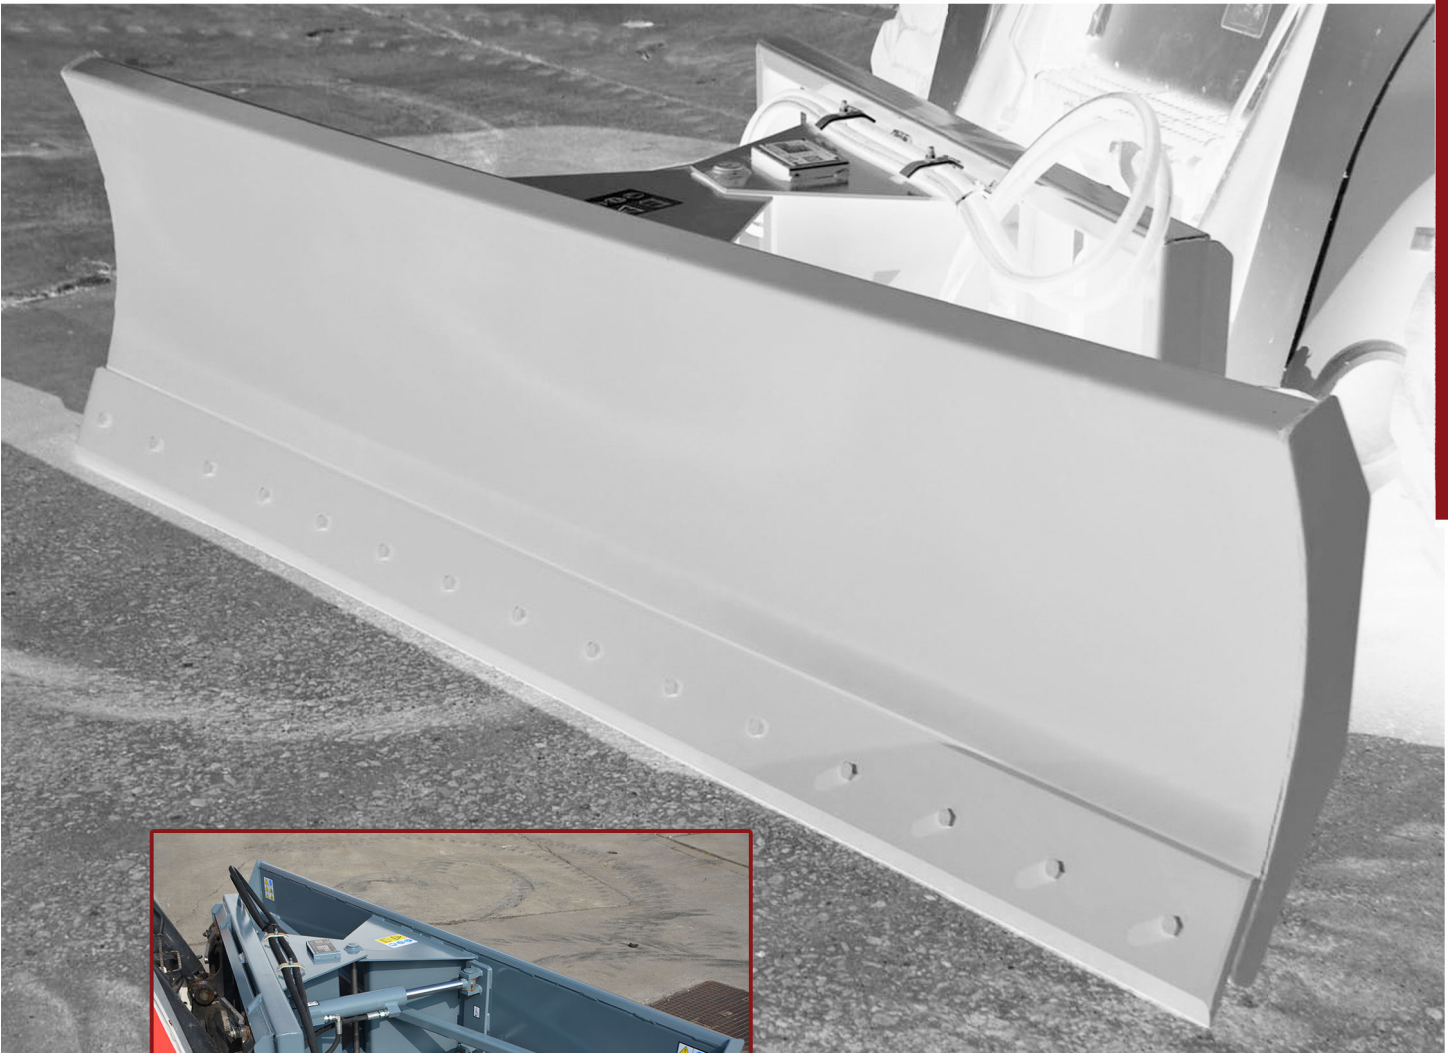

Características Specifications




▲ Sencilla y rápidamente acoplable a una gran cantidad de máquinas.

Easily and quickly attached to different machines.

Especificaciones Técnicas Technical features

Modelo Model	L	β	Altura Height	Peso Weight
	(m)		(mm)	(Kg) (*)
DBH.1220V	1.22	$\pm 30^\circ$	600	195
DBH.1370V	1.37	$\pm 30^\circ$	600	205
DBH.1520V	1.52	$\pm 30^\circ$	600	215
DBH.1670V	1.67	$\pm 30^\circ$	600	225
DBH.1820V	1.82	$\pm 30^\circ$	600	235
DBH.1900V	1.90	$\pm 30^\circ$	600	240
DBH.2000V	2.00	$\pm 30^\circ$	600	246
DBH.2200V	2.20	$\pm 30^\circ$	600	260

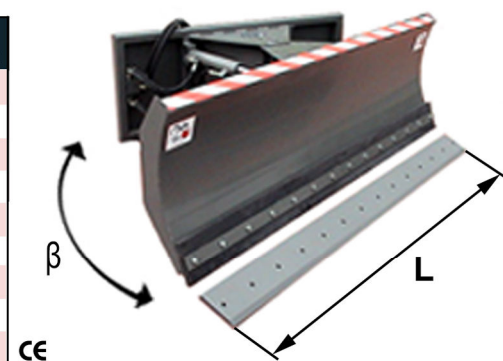

β - Angulación horizontal hidráulica.
- Hydraulic horizontal angulation.

- Entregas estándar con cuchilla de acero, de goma o de poliuretano.
- Standard deliveries with steel, rubber or polyurethane blade.

(*) - Peso del acoplamiento no incluido.
- Adaptor frame's weight not included.