



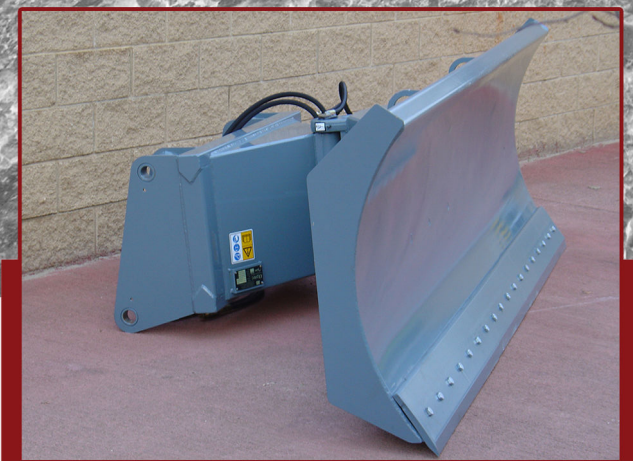


Hojas dozer con angulación hidráulica

Dozer blades with hydraulic angling

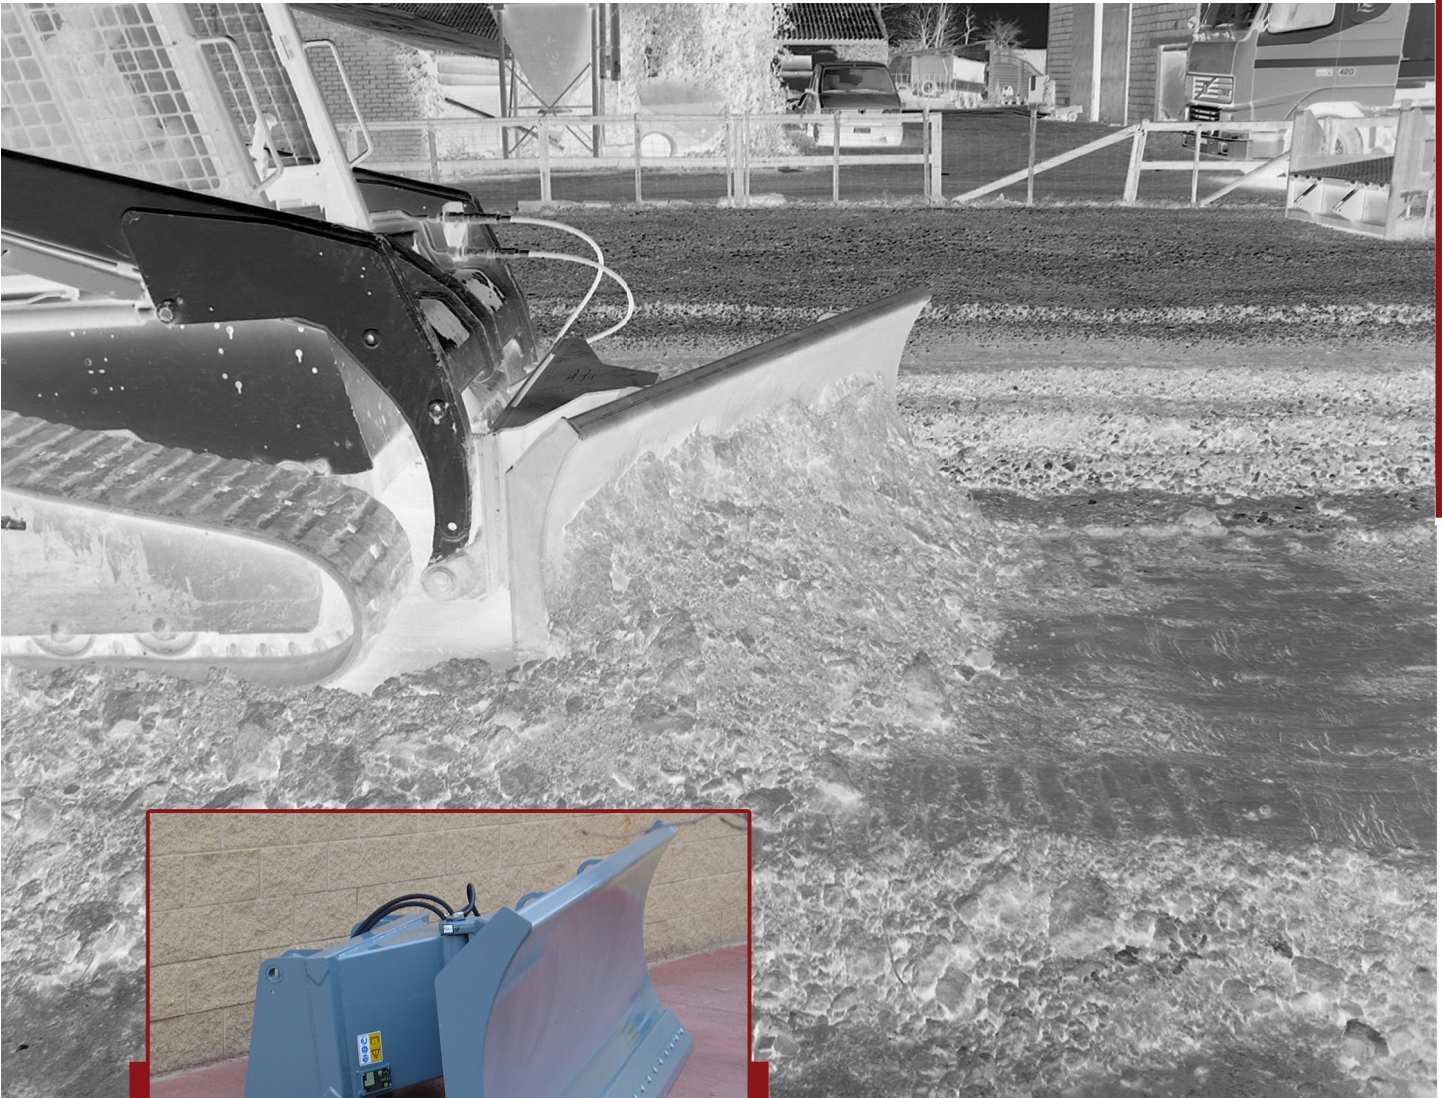

Características

Specifications

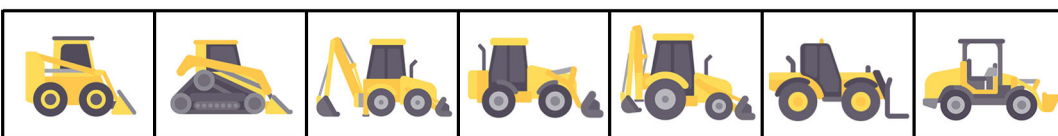


▲ Sencilla y rápidamente acoplable a una gran cantidad de máquinas.

Easily and quickly attached to different machines.

Especificaciones Técnicas

Technical features

Modelo Model	L	β	Altura Height	Peso Weight
	(m)		(mm)	(Kg) (*)
DBH.1800VH	1.80	$\pm 30^\circ$	700	455
DBH.2000VH	2.00	$\pm 30^\circ$	700	480
DBH.2200VH	2.20	$\pm 30^\circ$	700	505
DBH.2400VH	2.40	$\pm 30^\circ$	700	535
DBH.2600VH	2.60	$\pm 30^\circ$	700	565
DBH.2750VH	2.75	$\pm 30^\circ$	700	595

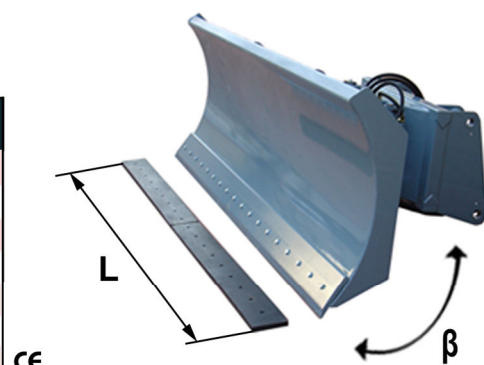

β - Angulación horizontal hidráulica.
- Hydraulic horizontal angulation.

- Entregas estándar con cuchilla de acero, de goma o de poliuretano.
- Standard deliveries with steel, rubber or polyurethane blade.

(*) - Peso del acoplamiento no incluido.
- Adaptor frame's weight not included.