



# AUGUSTA EVO

THE WITTUR RESIDENTIAL DOOR

NEW OPTIONS  
AVAILABLE



safety *in* motion™

wittur.com

AUGUSTA EVO is the affordable Wittur quality door for the residential market

# Augusta EVO



## 1 Easy and fast installation

- > Reduced depth and height dimensions
- > 3D adjustment possibilities to overcome offset shaft and irregular field conditions
- > Fast assembly time



## 2 High comfort and good performance

- > Low vibrations due to assembly design
- > Same rollers as HYDRA series guarantee low operating noise
- > Integrated reclosing device
- > Proven reliability and durability of key components



## 3 Easy maintenance

- > Easy access for maintenance parts
- > Same components for central and side opening version
- > Reduced stock and spare part management



## 4 Modular recyclable packaging

- > Cardboard modular packaging
- > All packaging materials are recyclable




## 5 Certifications

- > AUGUSTA EVO is designed to comply with the Lift Directive and the EN 81-20/50 norms, and it is available with fire-rated EN 81-58 E 120, EI 120, EI 60 and EW 60 certifications, Russia GOST E30 and EI 60, BS 476.




## 6 Finishes

- > Prime finish powder painted RAL 7032 (embossed)
- > Powder painted RAL (embossed)
- > Stainless steel
- > Skinplate

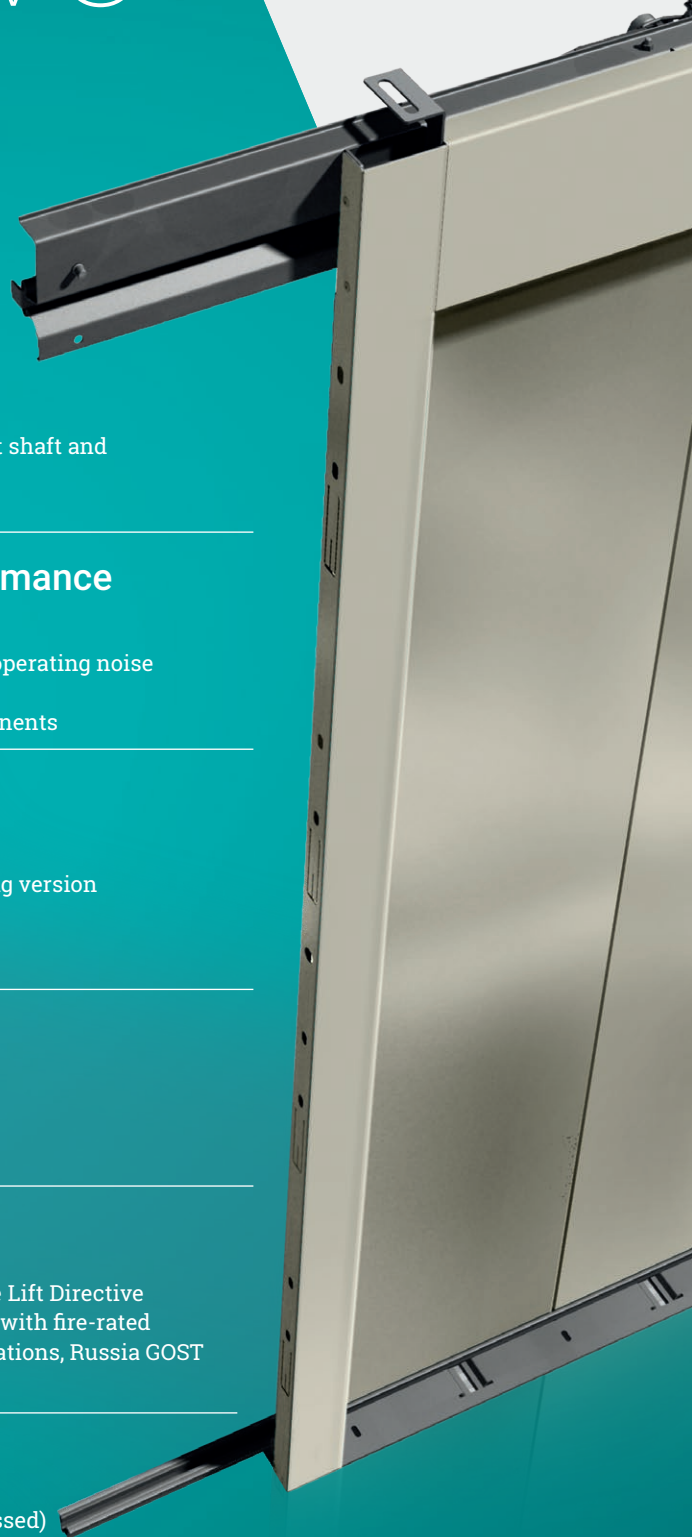


## Coupler

- > Standard version compliant with EN 81-20/50 with integrated car door lock
- > Coupler without integrated car door lock available as option for modernization projects
- > Compact 100 mm coupler without integrated car door lock available as option for reduced pit elevators.

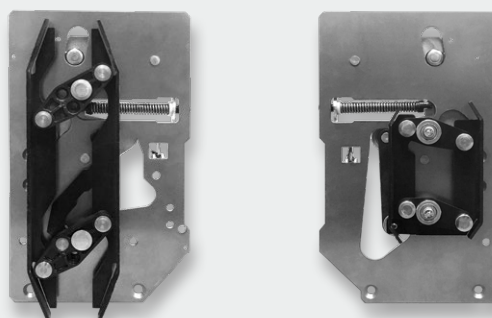





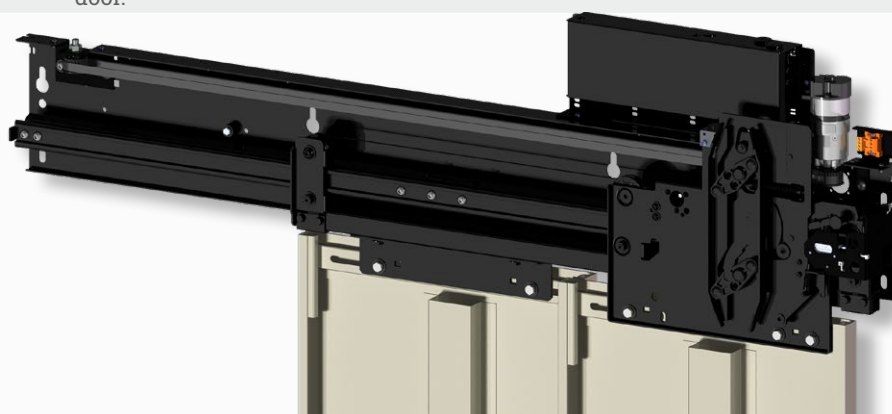



## Car door operator

- > ECO+ door drive (vertical or horizontal assembly): low energy consumption, low operating noise
- > Modular construction: same wear and tear components and spare parts as the landing door.




## Production range

Sill width (mm)	Landing doors		Car doors		Clear Opening (mm)*	Clear Height (mm)*
	Type	Illustration	Type	Illustration		
40	01/C		02/C		700	2000
80	11/R		12/R		800	2100
	11/L		12/L		900	
80	11/L		12/L		1000	2200
					1100	

\* Intermediate C.O. and C.H. are available in steps of 50 mm



**YOUR GLOBAL PARTNER FOR COMPONENTS,  
MODULES AND SYSTEMS IN THE ELEVATOR INDUSTRY**

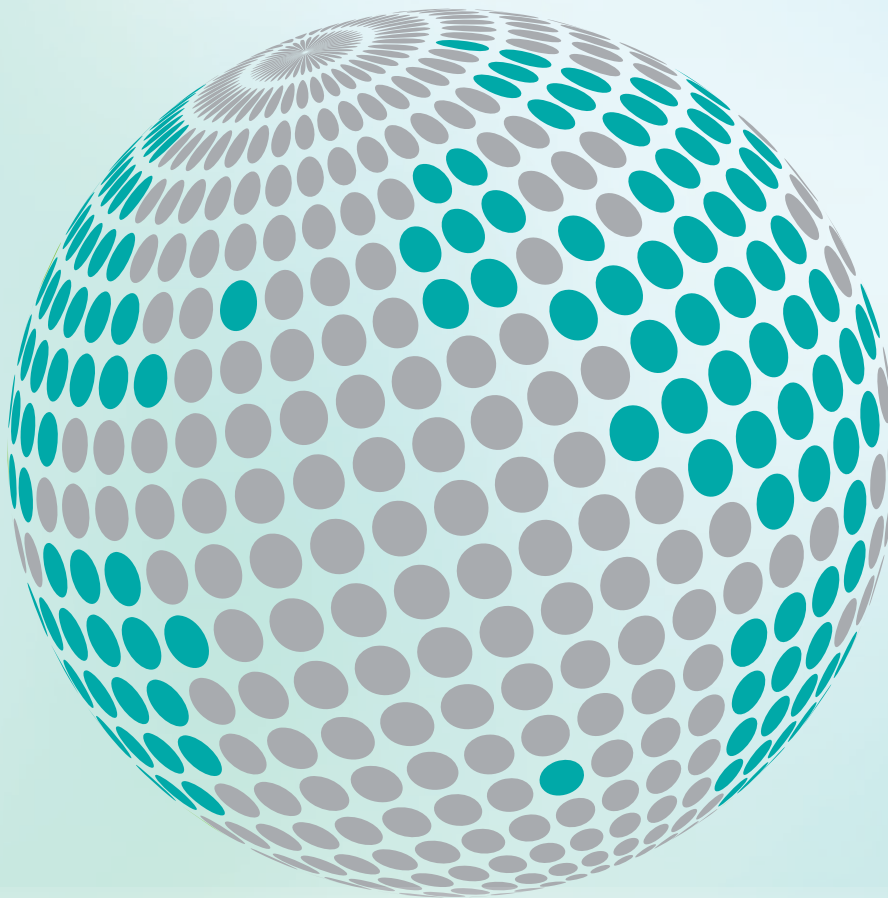

wittur.com

More information  
about Wittur Group  
available on-line.

