



ELEVATOR DOORS

NEW INSTALLATIONS
MODERNIZATIONS
SPECIAL PROJECTS



*safety in motion*TM

wittur.com

sematic[®]
a WITTUR brand

Standard Range

Each new installation or modernization requires different performances and technical features. Wittur's door product range was developed to cover them all.


Elevator rated speed

	Up to 2 m/s	Up to 2 m/s
Clear opening (mm)	700 - 1100	600 - 1400
Clear height (mm) *	2000 - 2200	2000 - 2300
C2 / Sill package (mm)	110	117
T2 / Sill package (mm)	190	185
T3 / Sill package (mm)	—	273
C4 / Sill package (mm)	—	185
C6 / Sill package (mm)	—	—
T1 / Sill package (mm)	—	—
Full glass	—	—
Framed Glass	—	○
EN 81-20/50	●	●
EN 81-71	—	○ Cat. 1
EN 81-72	—	○
EN 81-58 E	●	○
EN 81-58 EI	○	○
BS 476 E	○	—
GOST 53780/53781	○	—
Aluminium sill	●	●
Reinforced sill	—	○
Hidden sill	—	—
Door closing	Spring	Spirator, Counterweight
Light curtain	Fixed	Fixed
IP54	—	○
Door Drive	ECO+	SDS ECO+



Essential Augusta EVO

Augusta EVO is our affordable quality door for the residential market. Its effective design provides amazingly easy and fast installation and maintenance.

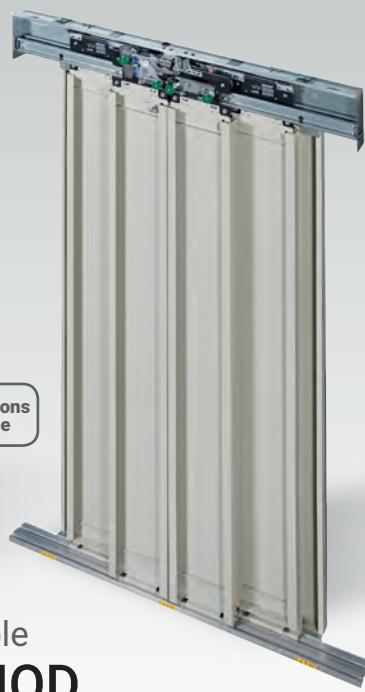

Flexible C-MOD

C-MOD combines compactness with high flexibility. Its different installations options make it suitable for any residential elevator.



Unlimited possibilities



Multipurpose Hydra

Hydra is our multifunctional door designed for maximum application flexibility. It features an almost unlimited range of executions and options.



Reliable



Strong and silent Pegasus

Pegasus is a multifunctional elevator door capable of withstanding heavy traffic in hotels, public buildings, hospitals and shopping centres.



Fast and quiet operation



High performance B-HR


The ideal solution for high-rise elevators. It guarantees extremely fast opening combined with quiet and smooth operation. Elevator door technology at its best!

Up to 4 m/s	Up to 5 m/s	Over 5 m/s
600 - 3200	600 - 3200	800 - 2400
2000 - 3500	2000 - 3800	2000 - 3000
180	180	195
210	210	265
256 / 302	292	—
210	210	265
302	302	—
180	180	—
○	○	○ (only for B-HR Low)
○	○	○
●	●	●
○ Cat. 1	○ Cat 1, ○ Cat 2	○ Cat 1
○	○	○
○	●	○
○	○	○
○	○	○
○	○	○
●	●	●
○	○	○
○	—	—
Spring / Counterweight	Spring / Counterweight	Spirator, Counterweight (B-HR MED/TOP), Spring (B-HR LOW)
Fixed and dynamic	Fixed and dynamic	Dynamic
○	○	○
ECO+ MIDI+ SUPRA	MIDI+ SUPRA	SDS SDS HV SDS MV



Heavy duty B-G

A door designed for industrial and freight elevators. Reinforced vandal resistant components and sturdy design guarantee safety and reliability at all times.

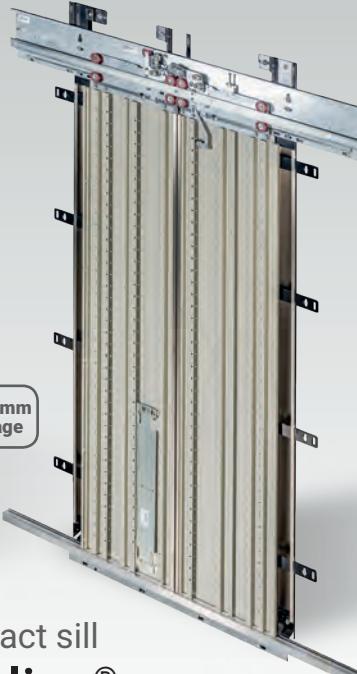

Compact sill Fineline®

Fineline incomparable compact sill design contributes to space saving: it can fit even in the smallest shafts.



Folding car door ECO BUS

ECO BUS is our light folding car door for modernization. Usually coupled with swing doors, it is perfect for those jobs that call for a car door with very limited weight and dimensions.

Up to 3 m/s

Up to 2 m/s

Up to 2 m/s

1000 - 3500

600 - 900

500 - 1100

2000 - 3500

1900 - 2100

2000 - 2100

165

85

—

255

115

—

345

—

—

255

Symmetrical 115 / Asymmetrical 115

130

345

—

—

—

—

—

○

—

—

○

—

—

●

●

●

○ Cat 1, ○ Cat 2

—

—

○

—

—

○

—

—

○

—

—

○

—

—

●

●

●

○ St. Steel | Bronze

—

—

Spirator

Counterweight

Spring

Fixed and dynamic

Fixed

Fixed

○


—

—

SDS
SDS MV




ECO+

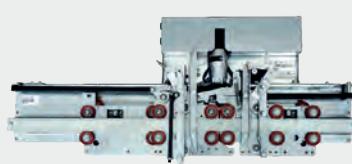

ECO+

Solutions available
for major Original
Equipment
Manufacturers

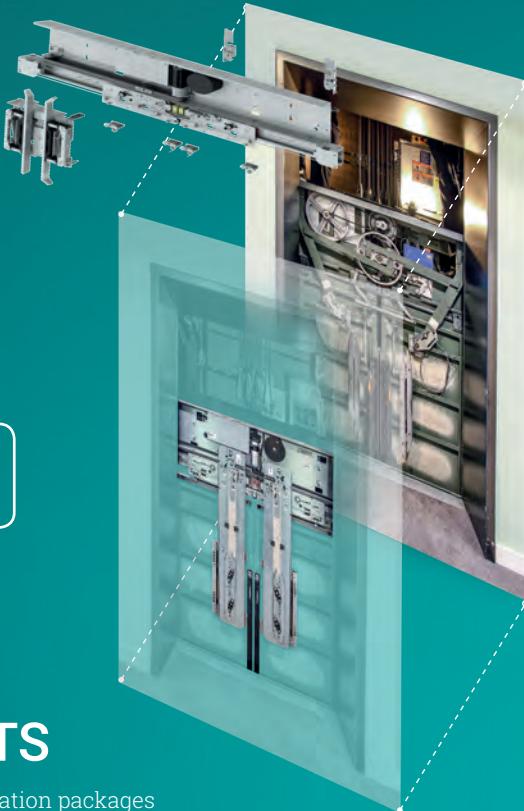

MOD KITS

We offer modernization packages for a wide range of elevator doors from well-known Original Equipment Manufacturers.

Up to 4 m/s

600 - 3500

1900 - 3500



Various

Fixed and dynamic



Various

Our modernization kits are supplied with all the customized interface components you need for your project: fixing kits, adapters for existing panels, special couplers to interface with landing doors or car door from the original equipment provider. No on-site adaptations required!

This makes your modernization work much easier and quicker.

- Complete or partial modernization kits available
- Car door modernization kits with retractable cam off-set to connect to existing landing doors
- Adjustable door lock to connect to existing landing doors
- Reduced mechanism height solutions for reduced inter-floor distance
- Panels hanging bolts and shoes can be adjusted to existing panels and sill
- Direct wall fixing without frames
- Wide range of frames and sill dimensions
- Frameless door execution can fit in very tight spaces
- Fire-certified executions with or without frames



Spare Parts

Wittur ensures the long-term availability of original spare parts for all its elevator products. Using original spare parts is a guarantee of safe operations, continuous efficiency

and best performance for your elevators. Contact our local sales team or visit our online platforms for further information.

Special Projects

Combining flexible engineering and operations excellence for extraordinary projects

Round shape



Round, top or underdriven

Luna

Luna round door is the ideal shape for prestigious and panoramic installations. It perfectly combines high-performance and good looks. It perfectly combines high-performance and good looks.

Light design



Straight underdriven

Nettuno

Nettuno is designed from the start with underdriven panels. This special execution lightens the design of panoramic elevators, achieves a higher aesthetic harmony and accounts for a clean shaft appearance with almost no visible mechanical component.

Elevator rated speed

Up to 3 m/s

Up to 3 m/s

Clear opening (mm)

600 - 1800

600 - 3200

Clear height (mm) *

2000 - 3000

2000 - 3000

C2 / Sill package (mm)

Underdriven 180 / Top driven 186

180

T2 / Sill package (mm)

—

270

T3 / Sill package (mm)

—

—

C4 / Sill package (mm)

—

270

C6 / Sill package (mm)

—

—

T1 / Sill package (mm)

Underdriven 180 / Top driven 186

180

Full glass

○

○

Framed Glass

○

○

EN 81-20/50

●

●

EN 81-71

—

—

EN 81-72

—

○

EN 81-58 E

○

○

EN 81-58 EI

—

—

BS 476 E

○

○

GOST 53780/53781

—

—

Aluminium sill

—

—

Reinforced sill

●

●

Hidden sill

—

—

Door closing

Spring

Spirator

Light curtain

Dynamic

Fixed and dynamic

IP54

○

○

Door Drive

SUPRA

MIDI+
SUPRA



Extra heavy duty



Non conventional solution

Sturdy and special Taurus

Taurus is our solution for extra heavy-duty goods elevator and can reach huge openings up to 5 metres. Its robust structure is made to last in the most demanding applications.

Up to 3 m/s	Up to 3,5 m/s
800 - 5000	800 - 1200
2000 - 5000	2000 - 2200
180	240
276	290
394	—
276	290
394	—
—	—
—	—
○	○
●	●
—	○
○	○
○	○
○	—
—	—
—	●
●	○
—	○
Counterweight	Spirator
Fixed and dynamic	Fixed and dynamic
○	○
Industrial motor	SDS, SWS + IRDA

* Depends from Clear Opening




Flexible engineering and operations excellence

Wittur has been developing special elevator doors for almost 50 years. We work as partners in special projects to provide doors which fit with the original vision of the architect. At the same time we provide industrialised components with the same lifecycle and the same safety level of standard elevator doors.



**YOUR GLOBAL PARTNER FOR COMPONENTS,
MODULES AND SYSTEMS IN THE ELEVATOR INDUSTRY**

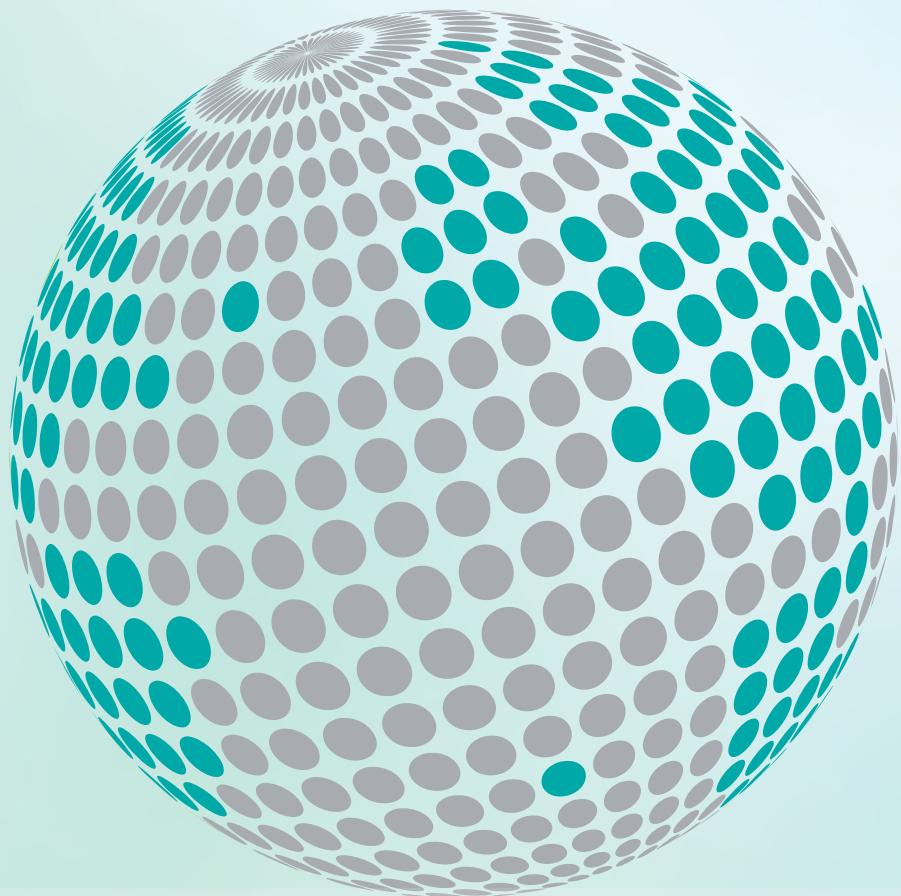

safety **in** *motion*™

wittur.com

More information
about Wittur Group
available on-line.

