



SOLUTIONS TO  
**MAKE LIFTING  
SAFER AND  
EASIER**



**PORTABLE /  
MOBILE GANTRY  
HOISTS**



# MODEL 1

500 - 1000KG WORKING LOAD

# PORTABLE / MOBILE GANTRY HOIST CRANE

THE LIGHTEST AND MOST VERSATILE UNIT ON THE MARKET

Ideal for movement of goods, machinery, general maintenance tasks in new and existing buildings as well as a confined space rescue solution.

**MODEL 1:**

**500 - 1000KG**




**DSW**  
SOLUTIONS


# GANTRY MODEL 1:

## MULTIPURPOSE

Telescopic, extremely strong sections making it ideal for a vast variety of working situations and locations.

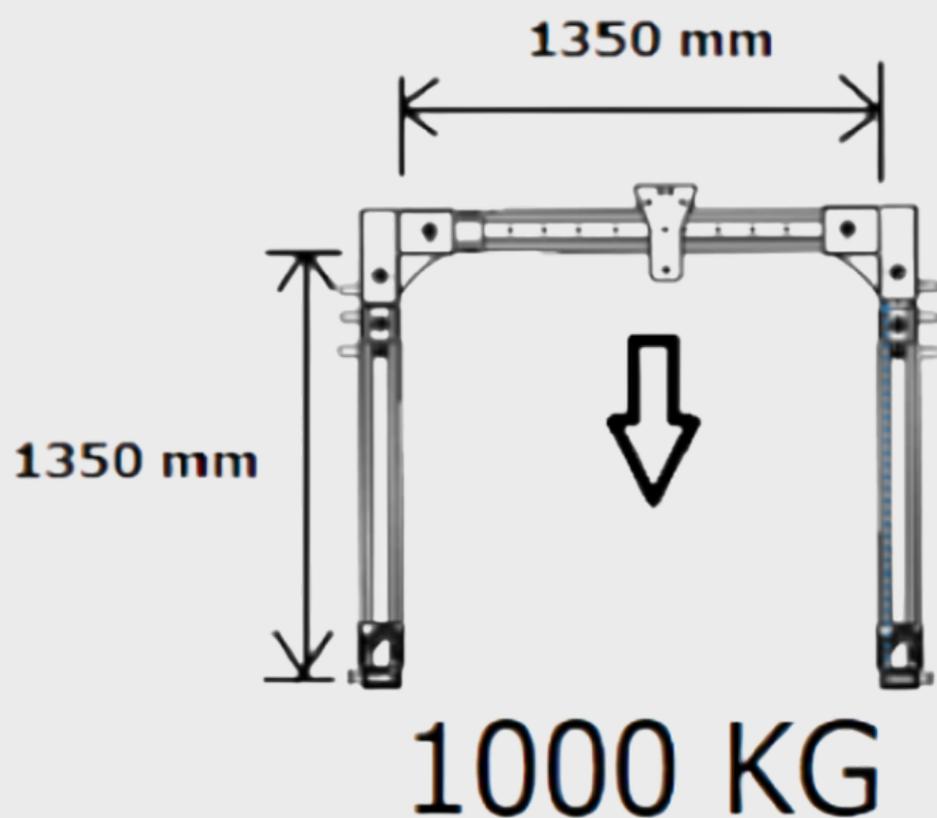

**WORKING WIDTH  
RANGE: 1350MM TO  
2000MM**

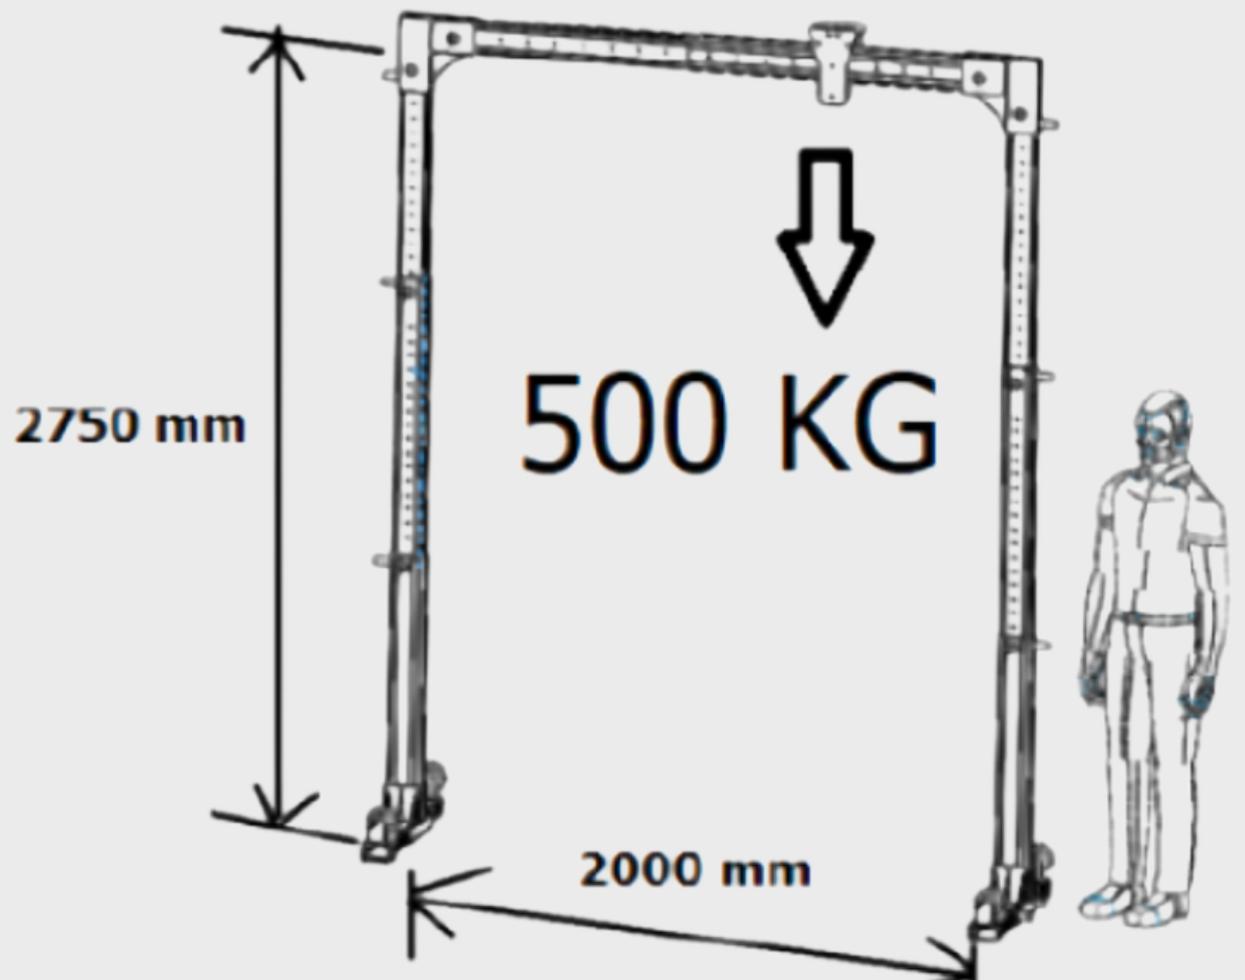

**WORKING HEIGHT  
RANGE: 1350MM TO  
2750MM**

# GANTRY MODEL 1:

THE LIGHTEST AND MOST VERSATILE UNIT ON THE MARKET

Ideal for movement of goods as well as persons for fall protection applications.

**ULTRA LIGHTWEIGHT:  
INDIVIDUAL PARTS  
ARE 15KG AND TOTAL  
ASSEMBLED WEIGHT  
ONLY 38KG**



# GANTRY MODEL 1:

OPTIMISE YOUR WORKING TIME

Ease of assembly including height and span adjustment.

**SINGLE  
PERSON  
ASSEMBLY**



# GANTRY MODEL 1:

**SAFETY FIRST**

Product is compliant to numerous international standards.

**CE**

**UNE15011;2011+A1**

**UNE EN 58144-5**

**UNE EN 58104-3**

**UNE EN 58132-5RD**

**1215/1997**

**UNE EN 795:2012**




# GANTRY MODEL 1:

MULTIPURPOSE

500kg SWL in any position or 1000kg in retracted position.

**INTEGRAL HIGH-  
STRENGTH  
ALUMINIUM  
A6085T5  
CONSTRUCTION**

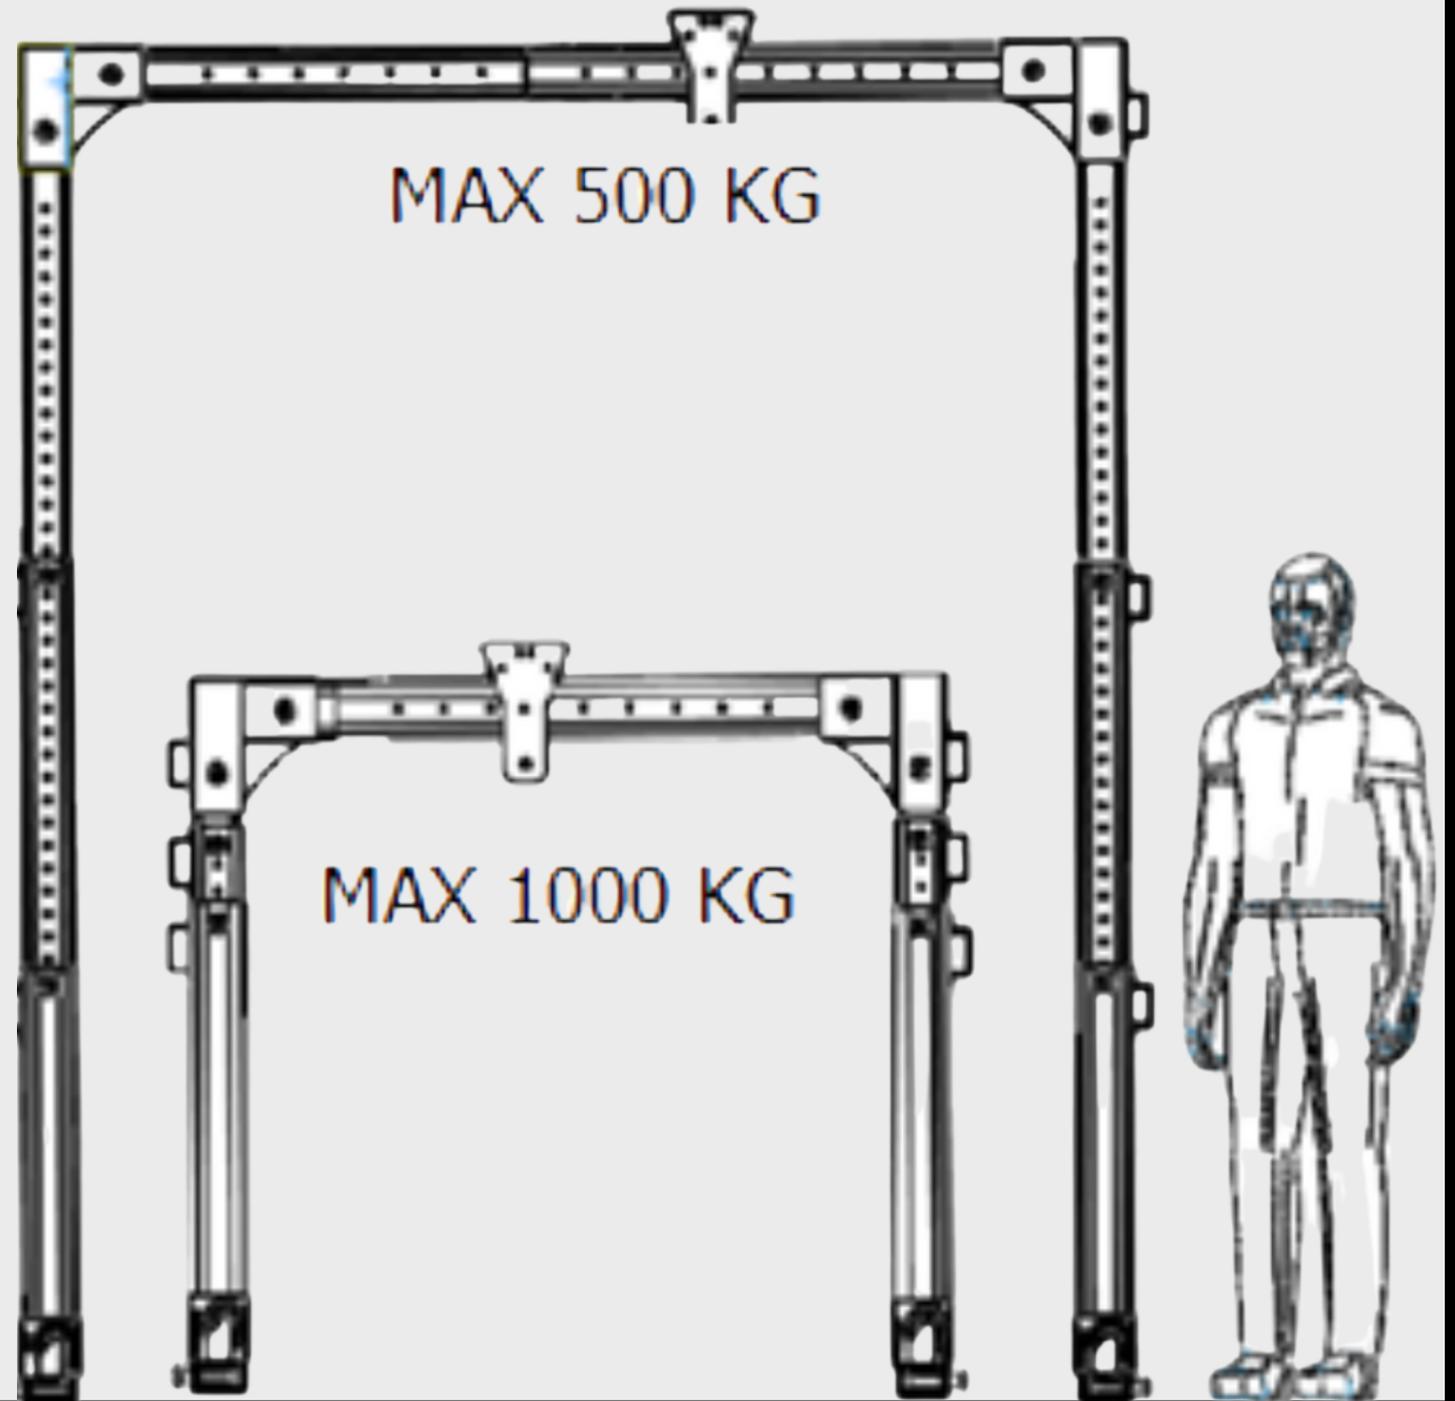

**DSW**  
SOLUTIONS



**SUITABLE  
FOR ANY  
SITUATION**



# PRODUCT SUMMARY:

<b>Product:</b>	<b>Gantry model 1</b>
<b>Span range:</b>	<b>1350 - 2000mm</b>
<b>Working height range:</b>	<b>1350 - 2750mm</b>
<b>Number of operatives to assembly:</b>	<b>1</b>
<b>Safe working load:</b>	<b>500 - 1000kg subject to positioning</b>
<b>Can support goods and personnel lifting:</b>	<b>Yes</b>
<b>Materials:</b>	<b>Aluminium A6082T5</b>
<b>Overall platform weight:</b>	<b>38kg</b>
<b>Standards:</b>	<b>UNE15011;2011+A1, UNE EN 58144-5, UNE EN 58104-3, UNE EN 58132-5RD 1215/1997 + UNE EN 795:2012</b>
<b>CE mark:</b>	<b>Yes</b>
<b>Patent:</b>	<b>Yes</b>

**DSW**  
SOLUTIONS

[WWW.DSW-SOLUTIONS.COM](http://WWW.DSW-SOLUTIONS.COM)

# CONTACT US



0034 623 028 722

[INFO@DSW-SOLUTIONS.COM](mailto:INFO@DSW-SOLUTIONS.COM)

[WWW.DSW-SOLUTIONS.COM](http://WWW.DSW-SOLUTIONS.COM)

**DSW**  
SOLUTIONS