

25/5 Drumpump

Standard Features include:

- Polypropylene and polyethylene construction – chemical resistant.
- True double action pump – innovative, easy, patented pumping technology.
- Delivers on both the up and down stroke – continuous fast flow.
- Anti-pumping/safety device – deters access by children and unauthorised personnel.
- Pumps from base of container – all contents emptied.
- Adaptor fittings – leak free, secure fit.
- Constructed from FDA compliant plastics – confidence with liquid food products.
- 24 month manufacturer's warranty – high quality construction.
- Fully serviceable – dispense container after container, year after year.
- Spout style – extender hose can be attached to outlet spout.

Technical Data		
Style	Output per stroke	Maximum depth neck to bottom
25/5 (For 25 litre (5 gallon) containers) (Also suitable for 20 and 30 litre (8 gallon) containers)	160ml (6oz)	420mm (16 1/2 inches)

Width of spout	Length of Spout	Width of case pipe	Adaptor Fitting
20mm (Spout opening fits 25mm (1 inch) diameter extender hose)	160mm (6 inches)	41mm (1 1/2 inches)	C57, C63, C69, C55, C63 *Fittings for all small cap openings available

Outer Carton Dimensions	Weight per pump	Outer carton dimensions (metric)	Outer carton dimensions (USA)
Each pump packaged in a plastic bag with a header card incorporating instructions stapled to the top.	400gms (.9lbs)	1170 x 300 x 270 mm 7kg 0.095 cubic metres	46 x 12 x 11 inches 15.4 lbs

 Tel: +34 977 312 168
email: info@aiqsa.com

www.aiqsa.com

Empresa registrada según normas



Quality



Safety



Reliability



Performance

60/15 Drumpump

Standard Features include:

- Polypropylene and polyethylene construction - chemical resistant.
- True double action pump – innovative, easy, patented pumping technology.
- Delivers on both the up and down stroke - continuous fast flow.
- Anti-pumping/safety device – deters access by children and unauthorised personnel.
- Pumps from base of container – all contents emptied.
- Adaptor fittings – leak free, secure fit.
- Constructed from FDA compliant plastics – confidence with liquid food products.
- 24 month manufacturer's warranty – high quality construction.
- Fully serviceable – dispense container after container, year after year.
- Spout style – Extender hose can be attached to outlet spout.

Technical Data

Style	Output per stroke	Maximum depth neck to bottom
60/15 (For 60 litre (15 gallon) drums) (Also suitable for 110 litre (30 gallon) and 40 litre (10 gallon) containers)	400ml (15oz)	770mm (30 inches)

Width of spout	Width of case pipe	Adaptor Fitting
20mm (Spout opening fits 25mm (1 inch) diameter extender hose)	41mm (1 1/2 inches)	M Fittings or C Fittings may be required.

Packaging	Weight per pump	Outer carton contents (metric)	Outer carton dimensions (USA)
10 pumps. Each pump packaged in a plastic sleeve with a header card incorporating instructions stapled to the top	635gms (1.4lbs)	1170 x 300 x 270mm 8.5kg 0.095 cubic metres	46 x 12 x 11 inches 20lbs



Tel: +34 977 312 168
email: info@aiqsa.com

www.aiqsa.com

Empresa registrada según normas



Quality



Safety



Reliability



Performance

200/55 Drumpump

Standard Features include:

- Polypropylene and polyethylene construction - chemical resistant.
- True double action pump – innovative, easy, patented pumping technology.
- Delivers on both the up and down stroke - continuous fast flow.
- Anti-pumping/safety device – deters access by children and unauthorised personnel.
- Pumps from base of container – all contents emptied.
- Adaptor fittings – leak free, secure fit.
- Constructed from FDA compliant plastics – confidence with liquid food products.
- 24 month manufacturer's warranty – high quality construction.
- Fully serviceable – dispense container after container, year after year.
- Spout style – Extender hose can be attached to outlet spout.



Technical Data

Style	Output per stroke	Maximum depth neck to bottom
200/55 (For 200 litre (55 gallon) drums) (Also suitable for 100 litre (30 gallon) drums)	400ml (15oz)	930mm (36 inches)

Width of spout	Width of case pipe	Adaptor Fitting
20mm (Spout opening fits 25mm (1 inch) diameter extender hose)	41mm (1 1/2 inch)	M69, M55, MBSP, MBSP55, MR, M63, M63R, M63B

Outer Carton Dimensions	Weight per pump	Outer carton dimensions (metric)	Outer carton dimensions (USA)
10 pumps. Each pump packaged in a plastic sleeve with a header card incorporating instructions stapled to the top.	700gms (1.6lbs)	1170 x 300 x 270 mm 8.9kg 0.095 cubicmetres	46 x 12 x 11 inches 20lbs



Tel: +34 977 312 168
email: info@aiqsa.com

www.aiqsa.com

Empresa registrada según normas



Quality



Safety



Reliability



Performance

1000/220 (IBC) Pump

Standard Features include:

- Polypropylene and polyethylene construction - chemical resistant.
- True double action pump - innovative, easy, patented pumping technology.
- Delivers on both the up and down stroke - continuous fast flow.
- Anti-pumping/safety device - deters access by children and unauthorised personnel.
- Pumps from base of IBC - all contents emptied, no risk of expensive wastage or hazardous chemical spill through IBC tap.
- Fitting for small cap in centre of IBC lid - leak free, secure fit.
- Constructed from FDA compliant plastics - confidence with liquid food products.
- 24 month manufacturer's warranty - high quality construction.
- Fully serviceable - dispense IBC after IBC, year after year.
- Optional non-siphon tube.

Technical Data

Style	Output per stroke	Maximum depth neck to bottom
-------	-------------------	------------------------------

1000/220 IBC
(For IBC, 1000 litre
totes, transi tanks,
flow bins, pods,
palleron)

400ml (15oz)

1185mm (46.5 inches)

Width of spout

Width of case pipe

Adaptor Fitting

20mm (Spout
opening fits 25mm
(1 inch) diameter
extender hose)

41mm (1 1/2 inch)

Most common fittings are
MBSP and M55

*Fittings for all small cap
openings available

Outer Carton Dimensions

Weight per pump

Outer carton contents 10 pumps

1430mm x 280mm
x 300mm

749gms
(1.8lbs)

Each pump is packaged in a
plastic sleeve with a header card
incorporating instructions stapled
to the top.



Tel: +34 977 312 168
email: info@aiqsa.com

www.aiqsa.com

Empresa registrada según normas



Quality



Safety



Reliability



Performance

Safety Measure

The Safety Measure will enhance all chemical safety programmes and make it easy to take responsibility for your own and your workers' safety.

The Safety Measure fits all Drumpumps.

The Safety Measure can be supplied with the Drumpump or is available separately as a conversion Kit.

The Safety Measure offers:

- Closed delivery - bottle fits easily and securely to unique pump spout.
- Safe, responsible, decanting and dilution - graduations on bottle.
- Measurement while pouring - unique two-way graduations on bottle.
- Lid closure - product cannot spill while being carried.
- Label - contents are identified.
- Spout - Safety Measure Spout (SMS)
 - Secure, safe, bayonet fit.
 - SMS fitted when Safety Measure supplied with Drumpump.
 - SMS supplied separately with Safety Measure Kit.

Technical Data				
Capacity	Graduations	Material	Cap Size	Cap Colours
1 litre / 32 floz	100mls / 4 floz	Polyethylene	38mm	White, red, blue


Safety Measure fitted to Drumpump

Packaging	Outer carton contents and dimensions
Drumpumps with Safety Measure packaged with instructions around handle.	As per respective Drumpump

Safety Measure Kit

Outer Carton contents	Outer carton contents	Outer carton dimensions (metric)
Safety Measure packaged in a plastic bag with Safety Measure Spout (SMS) and with a header card incorporating instructions stapled to the top.	25 Safety Measure Kits	1170 x 300 x 270mm 5kg 0.095 cubic metres

Safety Measure fitted to Drumpump

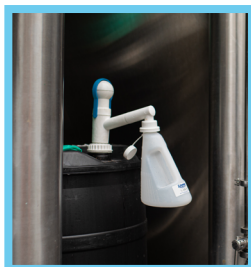

Safety Measure Kit Contents



Tel: +34 977 312 168
email: info@aiqsa.com

www.aiqsa.com


Empresa registrada según normas



Drumpump Servicing


This drumpumps are the only fully serviceable hand pump in the world. This assures longevity and excellent value. Some chemicals can be harsher on the low density polyethylene (LDPE) plastic components of our drum-pumps.

Should liquid be visible around the thread join, replace the seals. Ask for Seal Pack (Refer Steps 1-4)

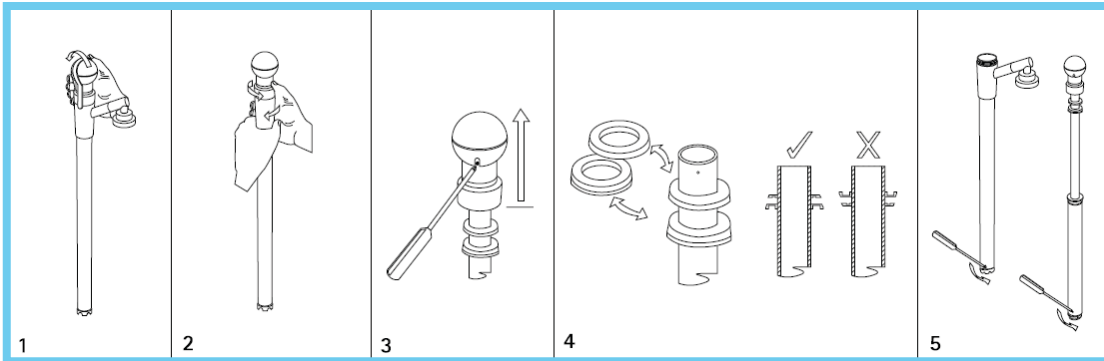

Should the Drumpump fail to pump, replace the valve flaps. Ask for Service Kit (Refer Steps 5-9)

Note: To minimise damage to the lugs of the foot valve holder (step 5) a pair of 200mm long nose pliers with 3mm flat on the fine end of the jaws can be used.

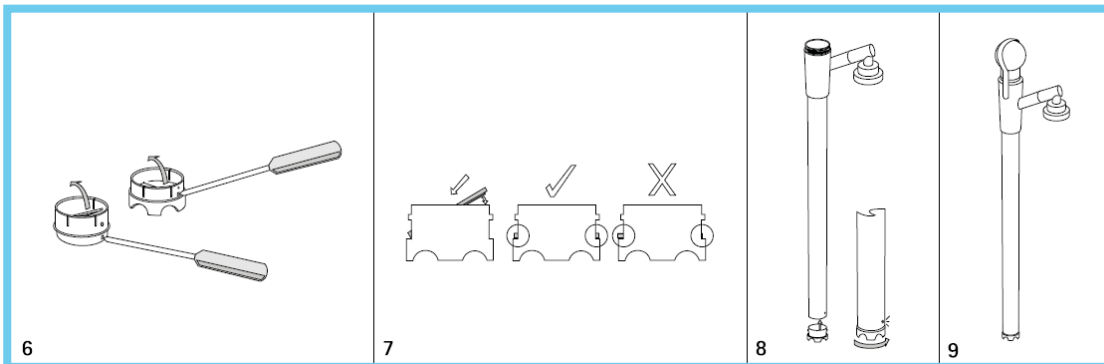

Seal Pack

Contents:

- 1x LDPE washer seal
- 1x LDPE scraper seal
- Easy to follow diagrammatic instructions

Service Pack

Contents:

- 1x LDPE washer seal
- 1x LDPE scraper seal
- 1x LDPE Foot Valve
- 1x LDPE Plunger Flap Valve
- Easy to follow diagrammatic instructions

Pump without waste

Technology to the World since 1991

In our early days we started with one person's vision to help manufacturers and resellers of liquid products grow their business through offering quality dispensing products.

A pair of kiwi inventors got together and created the Drum Pump; an instant success with farmers across New Zealand. It didn't take long for us to become a world leading company.

We have customers spanning 111 countries and myriad industries, from agriculture to breweries, who all rely on our pumps for safely moving a variety of fluids.

We are committed to delivering high quality pumps to customers. While focusing on innovation and growth, the purpose remains what it's always been: "to keep putting our customers first and offer the very best quality hand pumps".

Our values:



Quality



Safety



Reliability



Performance

Unique Pumping Principle

This special system pumps without critical fitting parts which means no wear. This system is ingenious in its simplicity and offers unsurpassed reliability and performance.

Quality, Reliability and Safety

Made from robust, FDA compliant plastics, drumpumps are used with confidence in many industries and in many market sectors around the world including agriculture, commercial, manufacturing and industrial.

Full 24 Month Warranty

All drumpumps are fully serviceable and come with a full 24 Month Manufacturer's Warranty.



Tel: +34 977 312 168
email: info@aiqsa.com

www.aiqsa.com

Empresa registrada según normas

