


www.picursa.com

Trituradora de PLATANERA



tritadoras
picursa

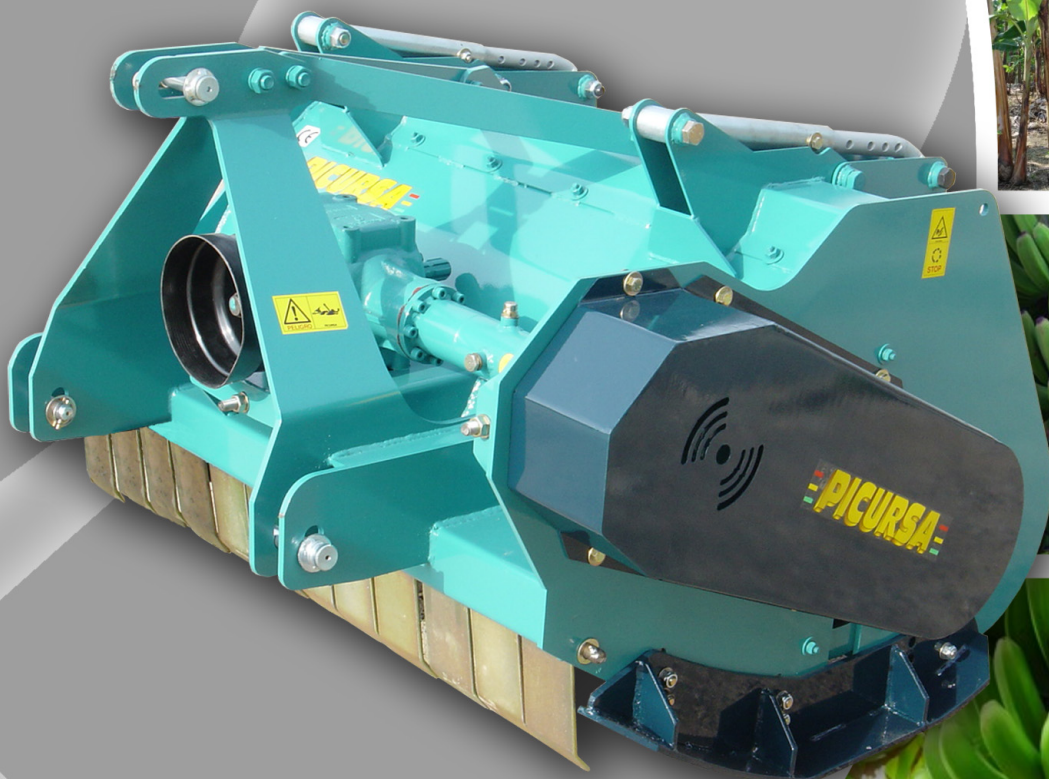

Trituradora de PLATANERA

modelo PL-UP					
Ancho Trabajo	Ancho total	Peso Kg.	Martillos	HP (indicativo)	R.P.M.
1200	1380	1410	12	60-70	550-1000
1400	1580	1645	14	70-80	550-1000
1600	1780	1880	16	80-90	550-1000
1800	1980	2080	18	90-100	550-1000
2000	2180	2280	24	100-110	550-1000
2200	2380	2480	26	120-130	550-1000



Baja absorción de potencia. Patines para la regulación de altura. Compuerta abatible hidráulica o manual. Construcción muy sólida y robusta. Triturado uniforme.



Faible absorption de puissance. Patins avec réglage de hauteur. Vanne rabattable hydraulique ou manuelle. Construction très solide et résistante. Broyage uniforme.



Low power absorption. Height-adjustable skids. Hydraulic or manual hinged gate. Very solid and robust construction. Even crushing.



Basso assorbimento di potenza. Pattini a regolazione d'altezza. Paratoia abbattibile idraulica o manuale. Costruzione molto solida e robusta. Trinciatura uniforme.



Geringe Leistungsaufnahme. Kufen zur Höheneinstellung. Hydraulisch oder manuell klappbare verschlupklappe. Solide und robuste Konstruktion. Gleichmässige Zerkleinerung.

Representante:



TRITURADORAS PICURSA, S.L.
 CTRA. GALLUR-SANGÜESA, KM. 16,700
 Tel.: (0034) 976 85 43 28 - Fax: (0034) 976 85 53 77
 50660 TAUSTE (ZARAGOZA) - ESPAÑA
 e-mail: trituradoras@picursa.com
 www.picursa.com