



www.picursa.com

Trituradora de TRACTOR serie AL

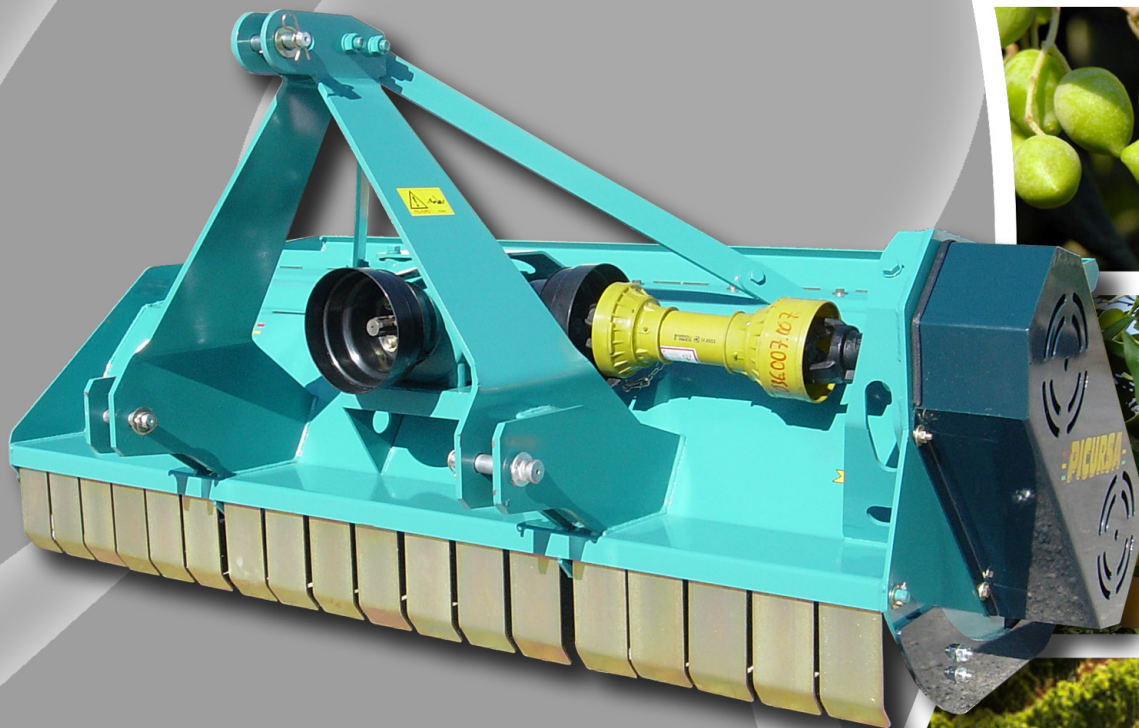

tritadoras
picursa

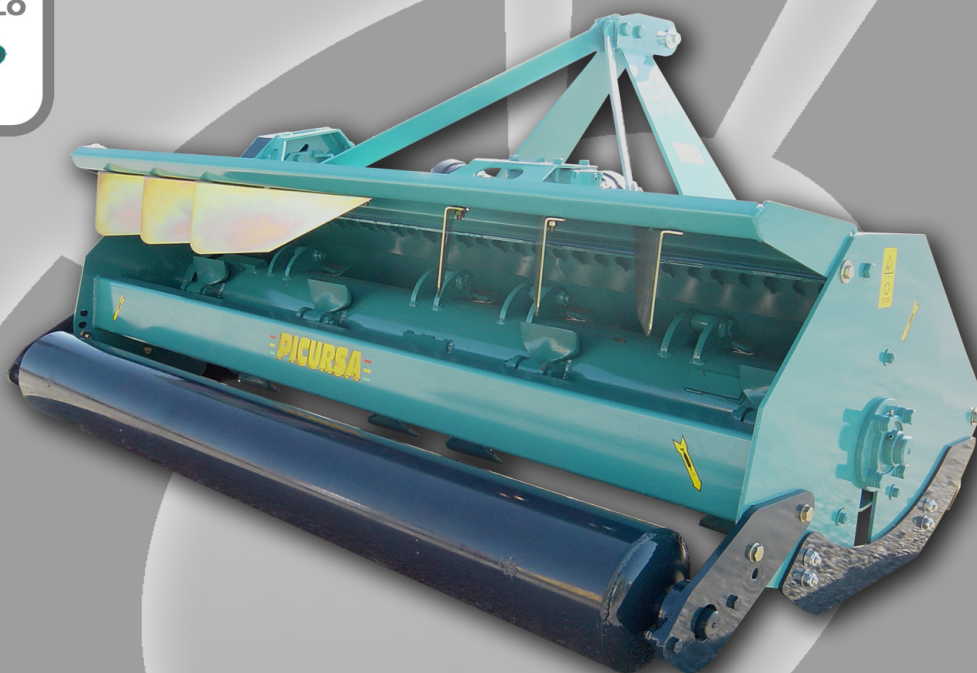

modelo T-AL

Ancho Trabajo	Ancho total	Peso Kg.	Martillos	HP (indicativo)	R.P.M.
1600	1780	695	16	50-70	550-1000
1800	1980	725	16	60-80	550-1000
2000	2180	755	20	70-90	550-1000
2300	2480	805	24	70-100	550-1000
2600	2780	850	24	80-100	550-1000
2800	2980	885	28	90-120	550-1000
3000	3180	915	28	110-140	1000
3200	3380	950	32	120-160	1000



Baja absorción de potencia. Rulo o ruedas para la regulación de altura. Compuerta abatible hidráulica o manual. Construcción muy sólida y robusta. Triturado uniforme.



Faible absorption de puissance. Roleaux ou roues avec réglage de hauteur. Vanne rabattable hydraulique ou manuelle. Construction très solide et résistante. Broyage uniforme.



Low power absorption. Rollers or wheels to adjust height. Hydraulic or manual hinged gate. Very solid and robust construction. Even crushing.



Basso assorbimento di potenza. Rulli o ruote per regolazione d'altezza. Paratoia abbattibile idraulica o manuale. Costruzione molto solida e robusta. Trinciatura uniforme.



Geringe Leistungsaufnahme. Rolle oder räder zur höheneinstellung. Hydraulisch oder manuell klappbare verschlupklappe. Solide und robuste konstruktion. Gleichmässige zerkleinerung.

Representante:



TRITURADORAS PICURSA, S.L.
 CTRA. GALLUR-SANGÜESA, KM. 16,700
 Tel.: (0034) 976 85 43 28 - Fax: (0034) 976 85 53 77
 50660 TAUSTE (ZARAGOZA) - ESPAÑA
 e-mail: trituradoras@picursa.com
www.picursa.com