




 **TE/S**



Trinciatrice polivalente spostabile

Side-Shift Multi-purpose mulcher
Broyeurs multifonctions Deportable
Trituradora multiusos Desplazable



Guarda il video
Watch video


serie PESANTE
series HEAVY

	Larghezza totale Total width Largeur hors tout Gesamtbreite
	Larghezza di lavoro Working width Largeur de travail Arbeitsbreite
	Spostamento Side-shift Déport Seitenverschiebung
	Potenza minima suggerita Min. suggested horsepower Puissance minimum suggérée Empfohlene Mindestleistung
	Peso della macchina Weight Poids Gewicht
	Numero di mazze Hammer no. Nombre de masses Anzahl der Schlegel

Trasmissione rotore
Rotor drive
Transmission rotor

n.4 XPB

TE / S						
Modello	cm	cm	cm - cm	HP	Kg	Nr.
140	150	140	50 - 90 90 - 50	60/90	680	10
160	170	160	50 - 110 90 - 70	60/90	720	10
170	180	170	50 - 120 90 - 80	60/90	750	14
180	190	180	50 - 130 90 - 90	70/90	780	14
190	200	190	50 - 140 90 - 100	70/90	810	14
200	210	200	50 - 150 90 - 110	70/90	840	14
210	220	210	50 - 160 90 - 120	70/90	870	16
220	230	220	50 - 170 90 - 130	70/90	900	16

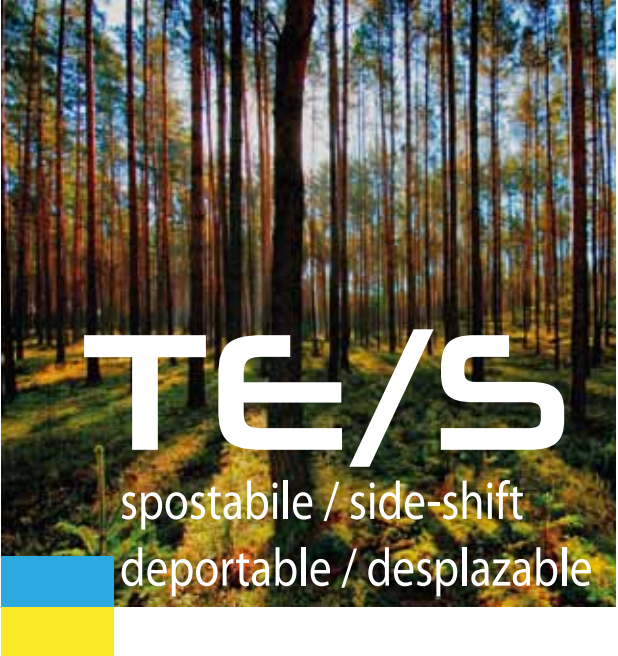

SPECIFICHE TECNICHE

- Potenza massima: 90 HP (66 KW)
- Gruppo di rinvio presa di forza a 540 giri/min con dispositivo di ruota libera interno
- Attacco universale a 3 punti 2a cat. spostabile idraulicamente (corsa 40 cm)
- Telaio unico rinforzato in Acciaio con lamiera di consumo antiusura
- Trasmissione a 4 cinghie trapezoidali dentellate in EPDM ad alta prestazione
- Tensionamento manuale delle cinghie
- Serie Controcoltello in Acciaio di serie disposti in tre file per una trinciatura fine
- Rotore Equilibrato Dinamicamente con supporti mazze antiusura
- Rotore con Mazze lisce e perni di fissaggio in Acciaio a Classe di resistenza 10.9
- Rullo posteriore autopulente regolabile in altezza (d.16 cm) rinforzato
- Bandelle di protezione anteriore rinforzate
- Piede di appoggio
- Giunto cardanico omologato "CE"
- Protezioni antinfortunistiche " CE"

ACCESSORI A RICHIESTA OPTIONAL ACCESSORIES

- Kit Slitte di appoggio regolabili in altezza
Skids adjustable in height



TECHNICAL SPECIFICATIONS

- Maximum horse: 90 HP (66 KW)
- Gearbox with freewheel safety device (for 540 rpm PTO)
- Displaceable 3-points linkage, Cat II Hydraulic side shift (length 40 cm)
- Unique chassis internal with Anti-wear metal sheet
- Rotor drive 4 Heavy-duty belts with EPDM compound
- Manual belts tensioning
- Counter-knives for a fine shredding
- Dynamic rotor balancing
- Rotor with flat hammer and fixing pin class 10.9
- Self-cleaning and adjustable rear roller (d.16 cm)
- Protection panels
- Support stationing
- PTO drive shaft homologated "CE"
- "CE" Safety protections

- Kit Ruote sterzanti rinforzate regolabili in altezza
Side steering wheels



- Kit Disco interfilare
Mower disk





Trinciatrice polivalente spostabile modello TES , progettato e sviluppato per soddisfare al meglio le più disparate esigenze di triturazione dai sarmenti di viti, erba e potature in genere di medio grandi dimensioni e alla pulizia dei terreni incolti.

Gli aspetti principali che contraddistinguono questo modello sono la robustezza della macchina, l'ampia area di triturazione, il basso assorbimento di potenza con un'elevata produttività e la possibilità di realizzare lavori d'elevata difficoltà con eccellente qualità del prodotto trinciato.

La Trinciatrice polivalente dispone di mazze disposte su file contrapposte per la copertura dell'intera zona di lavoro, trasmissione mediante cinghie trapezoidali rinforzate con facile registrazione esterna della tensione.

Rotore porta mazze equilibrato dinamicamente, Cuscinetti sovradimensionati.

The Side-Shift Multi-purpose mulcher model TES , designed and developed to satisfy all the different chipping requirements from grapevine shoots, grass and pruning in general to uncultivated ground.

The main aspects that marks this model are: the machine strength, the wide crashing area, the lowest power absorption with an high productivity and even the possibility to realize very difficult works whit an excellent quality.

The Multi-purpose mulcher has the rotor with flat hammers to cover the whole work area, rotor drive with 4 Heavy-duty belts , manual tensioning of the belts Electronically balanced rotor, Oversized bearings.






OMAT
agricultural equipment

OMAT Macchine agricole
Z. Ind. Via Antichi Pastifici B/16
70056- Molfetta (BA) - ITALY
Tel. / Fax. +39 080 338 8541
Mail: info@omatech.it
www.omatech.it



Concessionario / Dealer / Distribuidor