



Electric Pick & Carry Cranes



MC 450S (metric)
Max Capacity
45.000 kg

JMG[®]
move to solution



Barcelona
938498388

Valencia
961344394

Madrid
918951758

Vitoria
945365601

www.transgruas.com
info@transgruas.com

MC 450S

RADIO REMOTE CONTROLLED
FRONT-WHEELS DRIVE WITH COUNTER ROTATION

PROPORTIONAL TELESCOPIC BOOM

EXTENDIBLE REAR GROUP WITH
REMOVABLE COUNTERWEIGHTS

FRONT COMPASS
OUTRIGGERS



Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- MANUAL JIB
- MANUAL EXTENSION
- NON-MARKING TIRES
- HYDRAULIC FORKS
- MAN BASKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING







Technical features

Max Capacity kg	 45.000
Dimensions mm	 4900x2200x2415

	Front-wheels drive. 2 electric motors AC 12 kW 96V. Insulation class H		Electronic safe load indicator and tilting moment limiter
	TotalKg. 37,000 Removable counterweights Kg. 10,600		Automatic braking system on all wheels
	96 V - 1550 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 4 superelastic 40x16-30" Rear nr. 4 superelastic 355/50-20"		+63°/-4°
	Rear Steering angle -90°/+90°		Motor driven pump 1x45 kW - 96 V AC, 1x23 kW - 96 AC.

Load charts

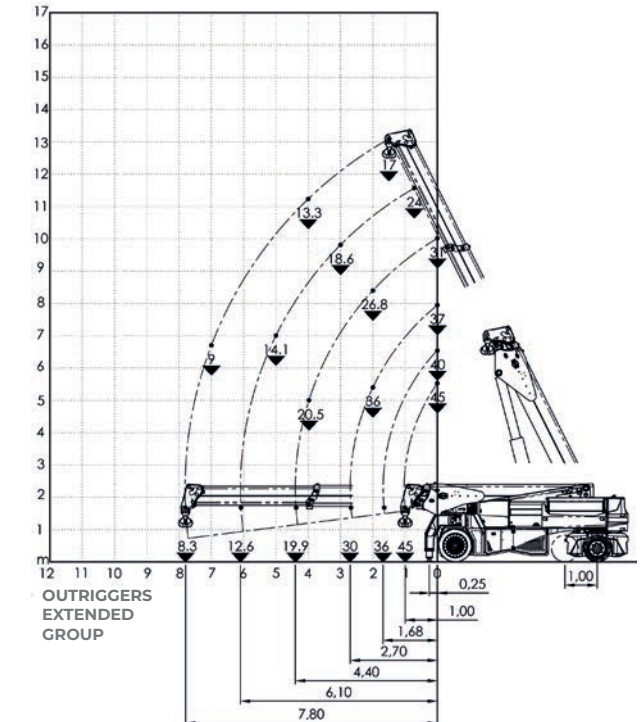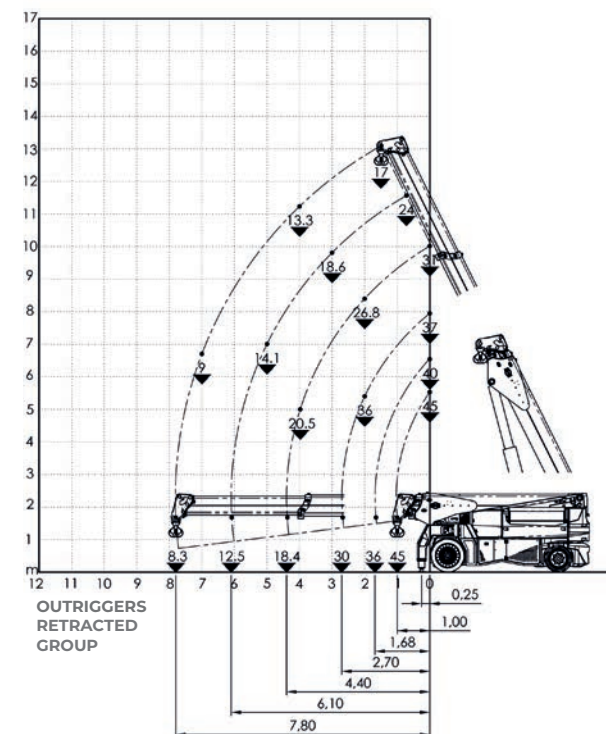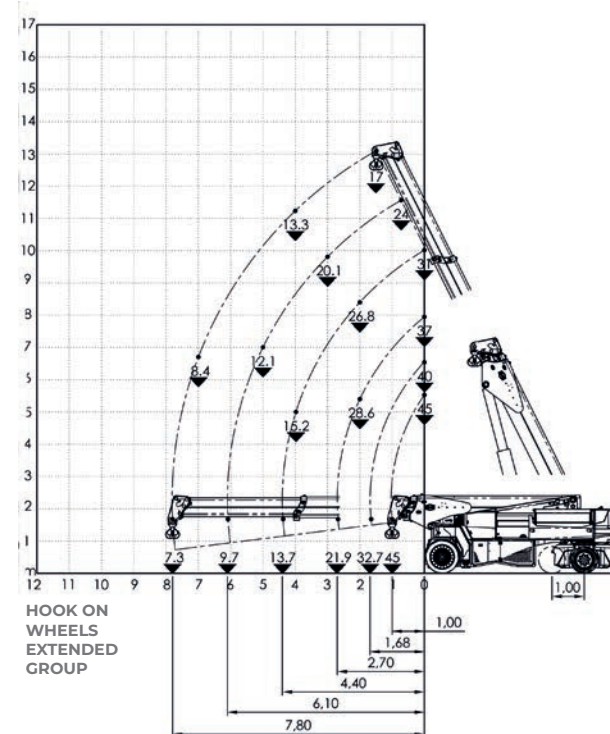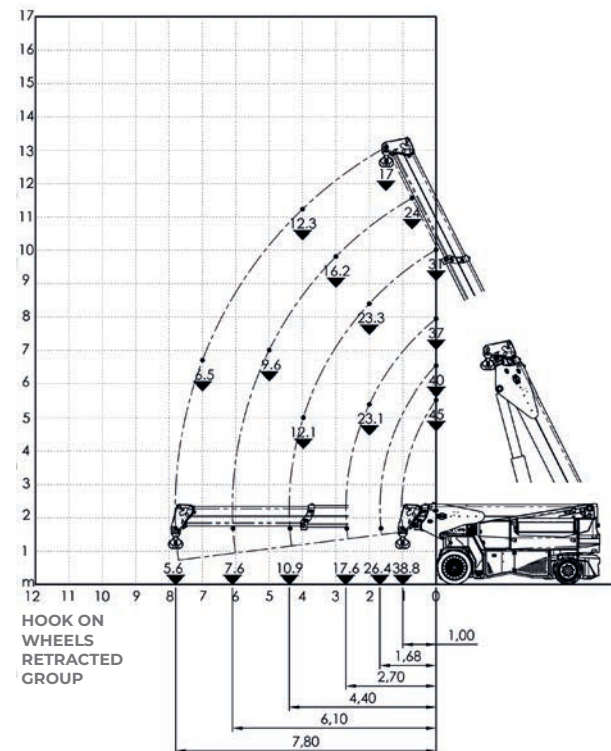

EU Standards CE

	UNI ISO 4301-1: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimension

