

Data subject to change without prior notice
Edition 10/2022 © 2022 JMG Cranes S.p.A. All rights reserved
Rev. 2 - 10/22



Electric Pick & Carry Cranes



MC 25S (metric)
Max Capacity 2,500 kg



Barcelona
938498388

Valencia
961344394

Madrid
918951758

Vitoria
945365601

www.transgruas.com
info@transgruas.com



MC 25S

RADIO REMOTE CONTROLLED
SEQUENTIAL BOOM

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

TILTING HEAD 3 POSITIONS (0°/ +35°/+ 70°)

REMOVABLE COUNTERWEIGHT


USB PLUG

Optionals:

- HYDRAULIC WINCH
- BENDABLE MANUAL EXTENSION
- NON-MARKING TIRES
- **ATEX CONVERSIONS**
- CUSTOMIZED PAINTING
- TOOL BOX
- VACUUM CUP



Load charts

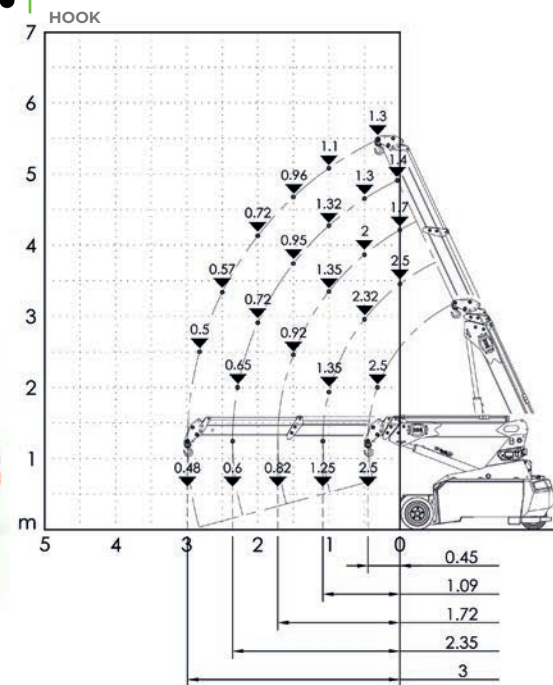


Technical features


Max Capacity kg	2.500
Dimensions mm	2190x900x1610

Front-wheels drive. 2 electric motors AC 2 kW 24V Insulation class H	LMI. Electronic safe load indicator and tilting moment limiter
Total Kg. 2.400 Removable counterweight Kg. 750	Automatic braking system on all wheels
24 V - 420 Ah 8 working hours	Fabricated from preformed and welded quality steel plate
Front nr. 2 superelastic 18x7-8" Rear nr. 2 superelastic 15x4 1/2-8"	+65°/-15°
Rear Steering angle -90°/+90°	Motor driven pump 3 kW - 24 V AC, Insulation class H

MANUAL JIB

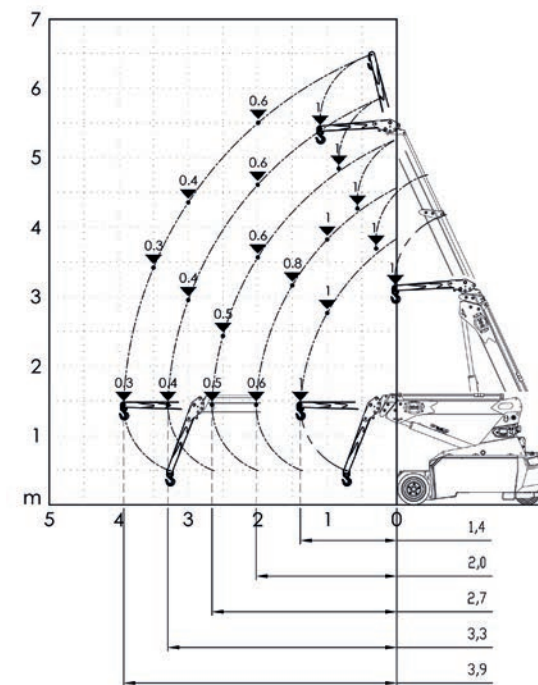

VACUUM CUP

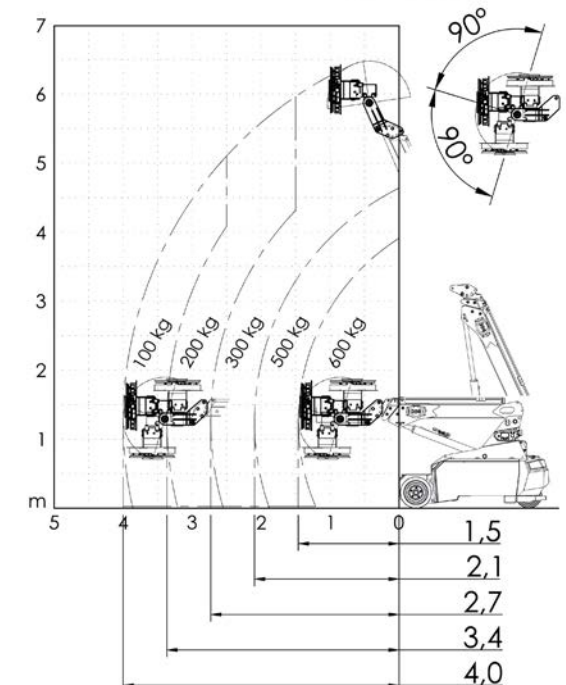

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2000/14-4301 -1:A1 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 e and subsequent modifications



Dimensions

