



Electric Pick & Carry Cranes



MC 130S (metric)
Max Capacity 13,000 Kg

JMG[®]
move to solution



Barcelona
938498388

Valencia
961344394

Madrid
918951758

Vitoria
945365601

www.transgruas.com
info@transgruas.com

MC 130S

RADIO REMOTE CONTROLLED

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHTS

TELESCOPIC BOOM


FRONT BAR FOR STABILITY

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- HYDRAULIC EXTENSION
- MANUAL JIB
- MANUAL EXTENSION
- NON-MARKING TIRES
- HYDRAULIC FORKS
- MAN BASKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING



Load charts

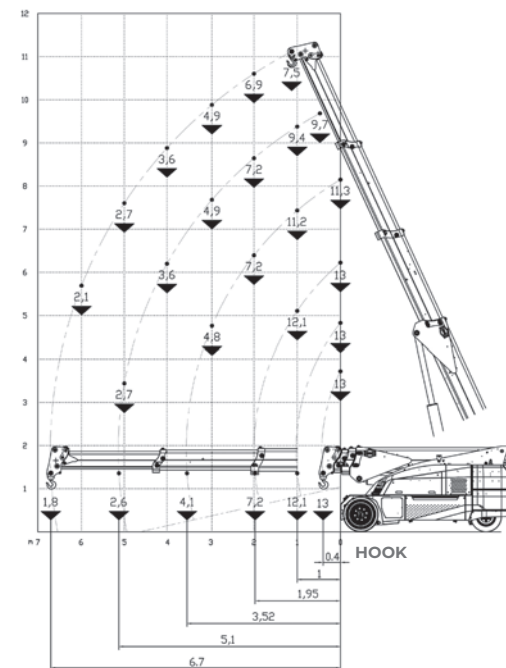


Technical features


Max Capacity kg	 13,000
Dimensions mm	 4030x1850x1990

	Front-wheels drive. 2 electric motors AC 8,5 kW 80V Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 14,500 Removable counterweights Kg. 4,000		Automatic braking system on all wheels
	80 V - 900 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 4 superelastic 300-15" Rear nr. 2 superelastic 250-15"		+65°/-5°
	Rear Steering angle -90°/+90°		Motor driven pump 23 kW - 80 V AC, Insulation class H

HOOK WITH FRONT BAR

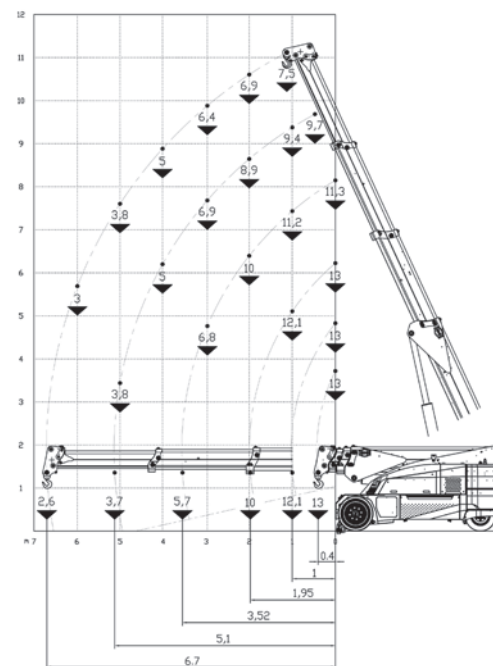

HYDRAULIC WINCH

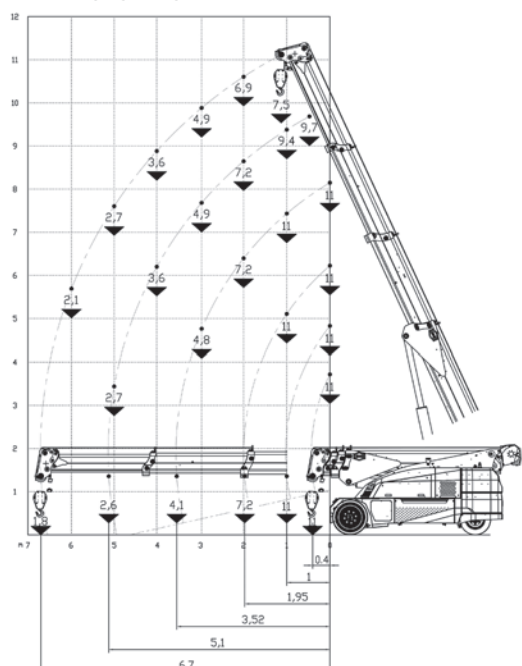

EU Standards CE

	UNI ISO 4301-1: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

